


Datasheet

DLPCA-200

Variable Gain Low Noise Current Amplifier

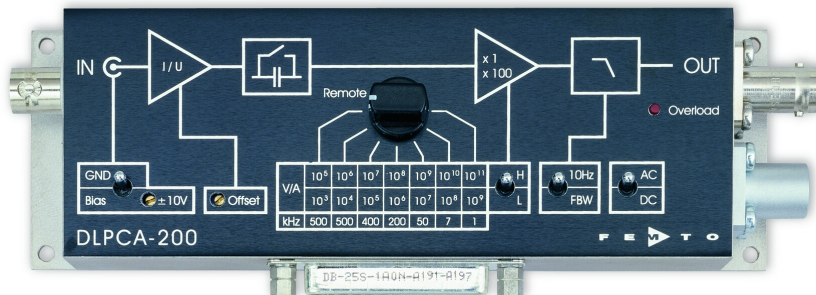


Features

- **Transimpedance (Gain) Switchable from 1×10^3 to 1×10^{11} V/A**
- **Bandwidth DC / 1 Hz ... 500 kHz**
- **Bandwidth Switchable to DC ... 10 Hz for Low Noise DC Measurements**
- **Bandwidth Independent of Detector Capacitance (up to 1 nF)**
- **Adjustable Bias Voltage**
- **Protection Against ± 3 kV Transients**
- **Local and Remote Control**

Applications

- **Photodiode and Photomultiplier Amplifier**
- **Scanning Tunneling Microscopy (STM)**
- **Spectroscopy**
- **Beam Monitoring for Particle Accelerators / Synchrotrons**
- **Ionisation Detectors**
- **Preamplifier for Lock-Ins, A/D-Converters, etc.**


Block Diagram

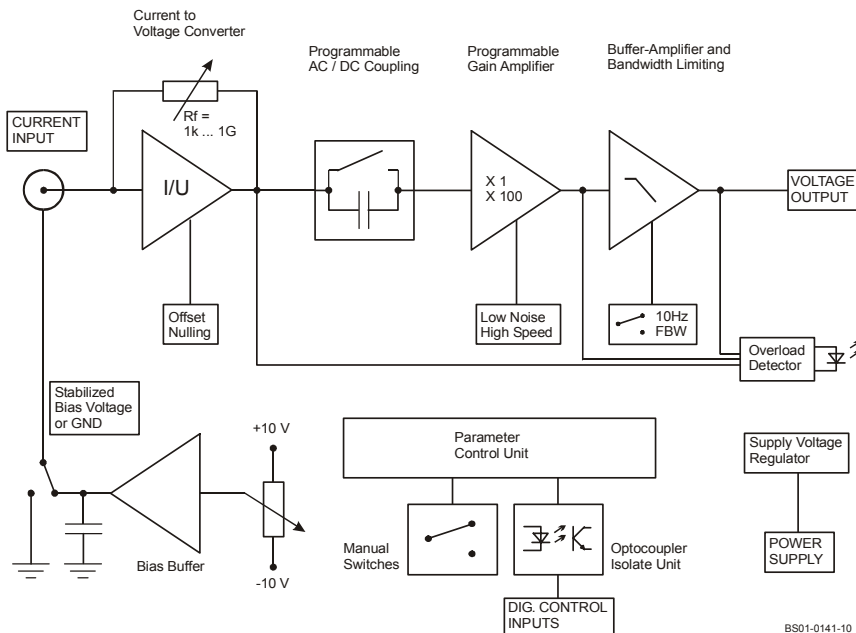

Variable Gain Low Noise Current Amplifier

Specifications	<i>Test Conditions</i>	<i>V_s = ± 15 V, T_a = 25°C</i>						
Gain	Transimpedance Gain Accuracy Gain Drift	1 x 10 ³ ... 1 x 10 ¹¹ V/A ± 1 % see table below						
Frequency Response	Lower Cut-Off Frequency Upper Cut-Off Frequency Gain Flatness	DC / 1 Hz up to 500 kHz (see table below), switchable to 10 Hz ± 0.1 dB						
Input	Equ. Input Noise Current Equ. Input Noise Voltage Input Offset Current Drift Input Bias Current Max. Input Current Input Offset Compensation	see table below 4 nV/√Hz (@ 1 kHz) see table below 1 pA typ. (max. 3 pA) see table below (value for linear amplification) adjustable by offset trimpot and external control voltage; max. range see table below						
Performance depending on Gain Setting	Gain Setting (Low Noise) (V/A)	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁷	10 ⁸	10 ⁹
	Upper Cut-Off Frequency (- 3 dB)	500 kHz	500 kHz	400 kHz	200 kHz	50 kHz	7 kHz	1.1 kHz
	Rise / Fall Time (10% - 90%)	700 ns	700 ns	900 ns	1.8 μs	7 μs	50 μs	300 μs
	Input Noise Current Density (√Hz)	20 pA	2.3 pA	450 fA	130 fA	43 fA	13 fA	4.3 fA
	measured at	10 kHz	10 kHz	10 kHz	1 kHz	1 kHz	100 Hz	100 Hz
	Integr. Input Noise Current (rms)*	21 nA	2.4 nA	500 pA	130 pA	41 pA	5.8 pA	0.8 pA
	Offset Current Drift (°C)	30 nA	3 nA	0.3 nA	30 pA	3 pA	0.3 pA	0.1 pA
	Gain Drift (°C)	0.008%	0.008%	0.008%	0.01%	0.01%	0.01%	0.02%
	Max. Input Current (±)	10 mA	1 mA	0.1 mA	10 μA	1 μA	0.1 μA	10 nA
	Input Offset Compensat. (±)	100 μA	10 μA	1 μA	0.1 μA	10 nA	1 nA	0.1 nA
	DC Input Impedance (// 5 pF)	50 Ω	50 Ω	50 Ω	60 Ω	150 Ω	1 kΩ	10 kΩ
	Gain Setting (High Speed) (V/A)	10 ⁵	10 ⁶	10 ⁷	10 ⁸	10 ⁹	10 ¹⁰	10 ¹¹
	Upper Cut-Off Frequency (- 3 dB)	500 kHz	500 kHz	400 kHz	200 kHz	50 kHz	7 kHz	1.1 kHz
	Rise / Fall Time (10% - 90%)	700 ns	700 ns	900 ns	1.8 μs	7 μs	50 μs	300 μs
	Input Noise Current Density (√Hz)	13 pA	1.8 pA	440 fA	130 fA	43 fA	13 fA	4.3 fA
	measured at	10 kHz	10 kHz	10 kHz	1 kHz	1 kHz	100 Hz	100 Hz
	Integr. Input Noise Current (rms)*	12 nA	1.8 nA	450 pA	120 pA	37 pA	5.3 pA	0.8 pA
	Offset Current Drift (°C)	30 nA	3 nA	0.3 nA	30 pA	3 pA	0.3 pA	0.1 pA
	Gain Drift (°C)	0.008%	0.008%	0.008%	0.01%	0.01%	0.01%	0.02%
	Max. Input Current (±)	100 μA	10 μA	1 μA	0.1 μA	10 nA	1 nA	0.1 nA
	Input Offset Compensat. (±)	100 μA	10 μA	1 μA	0.1 μA	10 nA	1 nA	0.1 nA
	DC Input Impedance (// 5 pF)	50 Ω	50 Ω	50 Ω	60 Ω	150 Ω	1 kΩ	10 kΩ
	* The integrated input noise is measured with an open but shielded amplifier input in the full bandwidth („FBW“) setting. The input referred peak-peak noise can be calculated from the rms noise as follows: $I_{\text{peak-peak}} = I_{\text{rms}} \times 6$ The output noise is given by: $U_{\text{peak-peak}} = I_{\text{peak-peak}} \times \text{Gain}$							
Output	Output Voltage Output Impedance Max. Output Current	± 10 V (@ ≥ 1 MΩ load) 50 Ω (terminate with ≥ 1 MΩ load for best performance) ± 30 mA						
Detector Bias	Bias Voltage Range	± 10 V, max. 22 mA (bias voltage connected to shield of BNC input socket, adjustable by trimpot, switchable to GND)						

Variable Gain Low Noise Current Amplifier

Indicator LED	Function	overload
Digital Control	Control Input Voltage Range	LOW bit: - 0.8 ... + 1.2 V, HIGH bit: 2.3 ... + 12 V
	Control Input Current	0 mA @ 0 V, 1.5 mA @ + 5 V, 4.5 mA @ + 12 V
	Overload Output	non active: 0 V, max. -1 mA, active: 5.1 V, max. 7 mA
Ext. Offset Control	Control Voltage Range	± 10 V
	Offset Control Input Impedance	20 kΩ
Power Supply	Supply Voltage	± 15 V
	Supply Current	+ 120 / - 80 mA typ. (depends on operating conditions, recommended power supply capability min. ± 200 mA)
	Stabilized Power Supply Output	± 12 V, max. ± 150 mA, + 5V, max. 50 mA
Case	Weight	320 g (0.74 lb.)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature	-40 ... +100 °C
	Operating Temperature	0 ... +60 °C
Absolute Maximum Ratings	Signal Input Voltage	-16 V / + 12 V
	Transient Input Voltage	± 3 kV (out of 200 pF source)
	Control Input Voltage	- 5 V / + 16 V
	Power Supply Voltage	± 22 V
Connectors	Input	BNC, isolated
	Output	BNC
	Detector Bias Output	shield of input BNC
	Power Supply	LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND
		
	Control Port	Sub-D 25-pin, female, qual. class 2 Pin 1: + 12 V (stabilized power supply output) Pin 2: - 12 V (stabilized power supply output) Pin 3: AGND (analog ground) Pin 4: + 5 V (stabilized power supply output) Pin 5: digital output: overload Pin 6: signal output (connected to BNC) Pin 7: NC Pin 8: input offset control voltage Pin 9: DGND (ground for digital control pins 10 - 14) Pin 10: digital control input: gain, LSB Pin 11: digital control input: gain Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: high speed / low noise Pin 15 - 25: NC

Variable Gain Low Noise Current Amplifier

Remote Control Operation

General

Remote control input bits are opto-isolated and connected by logical OR function to local switch settings. For remote control set the corresponding local switches to "Remote", "AC" and "H" (High Speed) and select the wanted setting via a bit code at the corresponding digital inputs. Mixed operation, e.g. local gain setting and remote controlled AC/DC setting, is also possible.

Switch settings "FBW / 10 Hz" and "Bias / GND" are not remote controllable.

Gain Setting


Low Noise Pin 14=HIGH Gain (V/A)	High Speed Pin 14=LOW Gain (V/A)	Pin 12 MSB	Pin 11	Pin 10 LSB
10^3	10^5	LOW	LOW	LOW
10^4	10^6	LOW	LOW	HIGH
10^5	10^7	LOW	HIGH	LOW
10^6	10^8	LOW	HIGH	HIGH
10^7	10^9	HIGH	LOW	LOW
10^8	10^{10}	HIGH	LOW	HIGH
10^9	10^{11}	HIGH	HIGH	LOW

AC/DC Setting

Coupling	Pin 13
AC	LOW
DC	HIGH


Application Diagram

Photo Detector Biasing

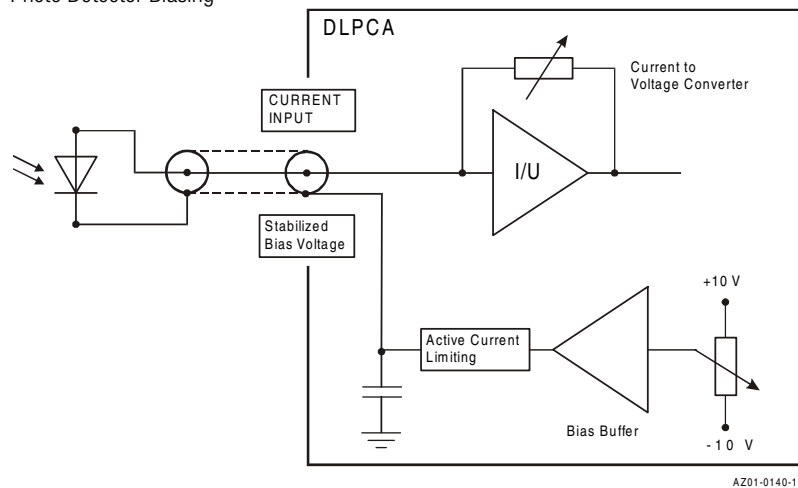

Variable Gain Low Noise Current Amplifier

Dimensions

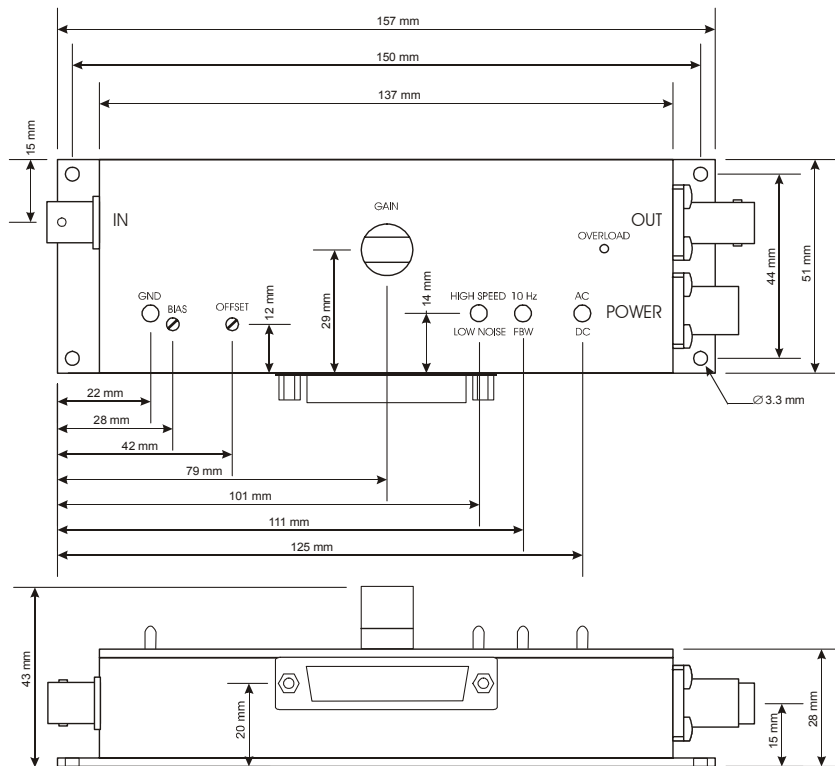

D201-0141-11

FEMTO Messtechnik GmbH
 Klosterstr. 64
 D-10179 Berlin • Germany
 Tel.: +49-(0)30-280 4711-0
 Fax: +49-(0)30-280 4711-11
 e-mail: info@femto.de
 http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
 © by FEMTO Messtechnik GmbH
 Printed in Germany



Datasheet

LUCI-10

USB to D-Sub Control Interface for FEMTO Amplifiers



Features	<ul style="list-style-type: none"> • Compact Digital I/O Interface for USB Remote Control of FEMTO Amplifiers • Supports Opto-Isolation of Amplifier Signal Path from PC USB Port • 16 Digital Outputs, 3 Opto-Isolated Digital Inputs • Bus-Powered Operation • System Driver, Application Software and VI's for use with LabVIEW™ Included 																					
Applications	<ul style="list-style-type: none"> • Remote Control of FEMTO® Amplifiers and Photoreceivers Directly from a PC 																					
Block Diagram	<p style="text-align: right; font-size: small;">BS-LUCI-10_R1</p>																					
Hardware Specifications	<table border="0"> <tr> <td data-bbox="264 1619 475 1648">General Characteristics</td> <td data-bbox="548 1619 727 1675">Bus Interface Digital I/O Channels</td> <td data-bbox="857 1619 1040 1675">USB 2.0 (full-speed) 16 output lines 3 opto-isolated input lines</td> </tr> <tr> <td></td> <td data-bbox="548 1703 610 1732">Supply</td> <td data-bbox="857 1703 1284 1759">PC USB port, + 5 V, typ. 100 mA, bus-powered (no auxiliary power supply required)</td> </tr> <tr> <td></td> <td data-bbox="548 1766 651 1795">Connectors</td> <td data-bbox="857 1766 1040 1822">USB type A D-Sub, 25 pin, male</td> </tr> <tr> <td></td> <td data-bbox="548 1829 602 1858">Cable</td> <td data-bbox="857 1829 1062 1858">AWG 28, length 1.8 m</td> </tr> <tr> <td data-bbox="264 1877 329 1906">Output</td> <td data-bbox="548 1877 732 1906">Number of Channels</td> <td data-bbox="857 1877 1357 1934">16 output lines, supporting opto-isolation inside FEMTO amplifiers and photoreceivers</td> </tr> <tr> <td></td> <td data-bbox="548 1940 743 1969">Output Voltage Range</td> <td data-bbox="857 1940 1357 1997">LOW bit: 0 ... + 0.5 V (@ 0 ... 2 mA output current) HIGH bit: + 4 ... + 5.5 V (@ 0 ... 2 mA output current)</td> </tr> <tr> <td></td> <td data-bbox="548 2003 667 2053">Max. Current Writing Rate</td> <td data-bbox="857 2003 1149 2053">6 mA per channel max. 800 operations per second</td> </tr> </table>	General Characteristics	Bus Interface Digital I/O Channels	USB 2.0 (full-speed) 16 output lines 3 opto-isolated input lines		Supply	PC USB port, + 5 V, typ. 100 mA, bus-powered (no auxiliary power supply required)		Connectors	USB type A D-Sub, 25 pin, male		Cable	AWG 28, length 1.8 m	Output	Number of Channels	16 output lines, supporting opto-isolation inside FEMTO amplifiers and photoreceivers		Output Voltage Range	LOW bit: 0 ... + 0.5 V (@ 0 ... 2 mA output current) HIGH bit: + 4 ... + 5.5 V (@ 0 ... 2 mA output current)		Max. Current Writing Rate	6 mA per channel max. 800 operations per second
General Characteristics	Bus Interface Digital I/O Channels	USB 2.0 (full-speed) 16 output lines 3 opto-isolated input lines																				
	Supply	PC USB port, + 5 V, typ. 100 mA, bus-powered (no auxiliary power supply required)																				
	Connectors	USB type A D-Sub, 25 pin, male																				
	Cable	AWG 28, length 1.8 m																				
Output	Number of Channels	16 output lines, supporting opto-isolation inside FEMTO amplifiers and photoreceivers																				
	Output Voltage Range	LOW bit: 0 ... + 0.5 V (@ 0 ... 2 mA output current) HIGH bit: + 4 ... + 5.5 V (@ 0 ... 2 mA output current)																				
	Max. Current Writing Rate	6 mA per channel max. 800 operations per second																				

USB to D-Sub Control Interface for FEMTO Amplifiers


Input	Number of Channels Input Voltage Range Switching Current Reading Rate	3 opto-isolated input lines LOW bit: - 20 ... + 1.5 V HIGH bit: + 3 ... + 20 V 1 mA typ. @ 5 V max. 400 operations per second
Power Supply	USB Port, Bus Powered Active Current Suspend Current	+ 4.5 ... + 5.5 V DC max. 200 mA / typ. 100 mA < 0.5 mA (standby mode of Windows®)
Case	D-Sub Case Weight Material	metal hood (EMI/RFI shielding), with jack screws 130 g (0.3 lb.) zinc die-cast, nickel plated
Temperature Range	Storage Temperature Operating Temperature	- 40 ... + 100 °C 0 ... + 50 °C
Absolute Maximum Ratings	Max. Voltage at Input Max. Short Circuit Output Current Max. Isolation Voltage	+/- 30 V +/- 20 mA per channel, 200 mA total +/- 60 V (Input Ground to Output Ground)
Connectors	Device Port PC Port	D-Sub, 25 pin, male Pin 1: NC Pin 2: NC Pin 3: GND (IN) Pin 4: NC Pin 5: Digital IN Pin 6: Digital IN Pin 7: Digital IN Pin 8: NC Pin 9: GND (OUT) Pin 10: Digital OUT Low Byte, LSB Pin 11: Digital OUT Low Byte Pin 12: Digital OUT Low Byte Pin 13: Digital OUT Low Byte Pin 14: Digital OUT Low Byte Pin 15: Digital OUT Low Byte Pin 16: Digital OUT Low Byte Pin 17: Digital OUT Low Byte, MSB Pin 18: Digital OUT High Byte, LSB Pin 19: Digital OUT High Byte Pin 20: Digital OUT High Byte Pin 21: Digital OUT High Byte Pin 22: Digital OUT High Byte Pin 23: Digital OUT High Byte Pin 24: Digital OUT High Byte Pin 25: Digital OUT High Byte, MSB USB type A

USB to D-Sub Control Interface for FEMTO Amplifiers

Software Specifications	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 5px;">Software (included on CD)</td> <td style="padding: 5px;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 5px;">Device Driver</td> <td style="padding: 5px;">dynamic link library (DLL) for integration in Microsoft Windows[®] operating system for use with C/C++, LabWindows[™] /CVI[™] or LabVIEW[™]</td> </tr> <tr> <td style="padding: 5px;">Application Software</td> <td style="padding: 5px;">GUI (graphical user interface) programs for simple remote control of FEMTO amplifiers and photoreceivers provided as executable programs and LabVIEW projects</td> </tr> <tr> <td style="padding: 5px;">LabVIEW Programs</td> <td style="padding: 5px;">sample programs to control and test the LUCI-10 hardware (including front panel and block diagram)</td> </tr> <tr> <td style="padding: 5px;">LabVIEW Library</td> <td style="padding: 5px;">special VI toolkit for integration in LabVIEW development environment</td> </tr> </table> </td> </tr> </table> <p style="margin-top: 10px;">Note: A National Instruments LabVIEW[™] license is not included in this software package. For use of the GUI application programs the LabVIEW Run-Time Engine is required. If not detected on the host PC during the installation process the LabVIEW Run-Time Engine will be installed automatically from the CD.</p>	Software (included on CD)	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 5px;">Device Driver</td> <td style="padding: 5px;">dynamic link library (DLL) for integration in Microsoft Windows[®] operating system for use with C/C++, LabWindows[™] /CVI[™] or LabVIEW[™]</td> </tr> <tr> <td style="padding: 5px;">Application Software</td> <td style="padding: 5px;">GUI (graphical user interface) programs for simple remote control of FEMTO amplifiers and photoreceivers provided as executable programs and LabVIEW projects</td> </tr> <tr> <td style="padding: 5px;">LabVIEW Programs</td> <td style="padding: 5px;">sample programs to control and test the LUCI-10 hardware (including front panel and block diagram)</td> </tr> <tr> <td style="padding: 5px;">LabVIEW Library</td> <td style="padding: 5px;">special VI toolkit for integration in LabVIEW development environment</td> </tr> </table>	Device Driver	dynamic link library (DLL) for integration in Microsoft Windows [®] operating system for use with C/C++, LabWindows [™] /CVI [™] or LabVIEW [™]	Application Software	GUI (graphical user interface) programs for simple remote control of FEMTO amplifiers and photoreceivers provided as executable programs and LabVIEW projects	LabVIEW Programs	sample programs to control and test the LUCI-10 hardware (including front panel and block diagram)	LabVIEW Library	special VI toolkit for integration in LabVIEW development environment		
Software (included on CD)	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 5px;">Device Driver</td> <td style="padding: 5px;">dynamic link library (DLL) for integration in Microsoft Windows[®] operating system for use with C/C++, LabWindows[™] /CVI[™] or LabVIEW[™]</td> </tr> <tr> <td style="padding: 5px;">Application Software</td> <td style="padding: 5px;">GUI (graphical user interface) programs for simple remote control of FEMTO amplifiers and photoreceivers provided as executable programs and LabVIEW projects</td> </tr> <tr> <td style="padding: 5px;">LabVIEW Programs</td> <td style="padding: 5px;">sample programs to control and test the LUCI-10 hardware (including front panel and block diagram)</td> </tr> <tr> <td style="padding: 5px;">LabVIEW Library</td> <td style="padding: 5px;">special VI toolkit for integration in LabVIEW development environment</td> </tr> </table>	Device Driver	dynamic link library (DLL) for integration in Microsoft Windows [®] operating system for use with C/C++, LabWindows [™] /CVI [™] or LabVIEW [™]	Application Software	GUI (graphical user interface) programs for simple remote control of FEMTO amplifiers and photoreceivers provided as executable programs and LabVIEW projects	LabVIEW Programs	sample programs to control and test the LUCI-10 hardware (including front panel and block diagram)	LabVIEW Library	special VI toolkit for integration in LabVIEW development environment				
Device Driver	dynamic link library (DLL) for integration in Microsoft Windows [®] operating system for use with C/C++, LabWindows [™] /CVI [™] or LabVIEW [™]												
Application Software	GUI (graphical user interface) programs for simple remote control of FEMTO amplifiers and photoreceivers provided as executable programs and LabVIEW projects												
LabVIEW Programs	sample programs to control and test the LUCI-10 hardware (including front panel and block diagram)												
LabVIEW Library	special VI toolkit for integration in LabVIEW development environment												
System Requirements	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 5px;">Operating System</td> <td style="padding: 5px;">Microsoft Windows XP with Service Pack 2, or higher</td> </tr> <tr> <td style="padding: 5px;">Processor</td> <td style="padding: 5px;">Intel Pentium III or AMD Athlon, or better</td> </tr> <tr> <td style="padding: 5px;">System Memory</td> <td style="padding: 5px;">512 MB of RAM, or more</td> </tr> <tr> <td style="padding: 5px;">Hard Disk Space</td> <td style="padding: 5px;">about 200 MB</td> </tr> <tr> <td style="padding: 5px;">Interface Port</td> <td style="padding: 5px;">USB 1.1 or USB 2.0</td> </tr> <tr> <td style="padding: 5px;">Supported FEMTO Modules</td> <td style="padding: 5px;">any standard FEMTO amplifier or photoreceiver with 25 pin D-Sub socket, except model HLVA-100</td> </tr> </table>	Operating System	Microsoft Windows XP with Service Pack 2, or higher	Processor	Intel Pentium III or AMD Athlon, or better	System Memory	512 MB of RAM, or more	Hard Disk Space	about 200 MB	Interface Port	USB 1.1 or USB 2.0	Supported FEMTO Modules	any standard FEMTO amplifier or photoreceiver with 25 pin D-Sub socket, except model HLVA-100
Operating System	Microsoft Windows XP with Service Pack 2, or higher												
Processor	Intel Pentium III or AMD Athlon, or better												
System Memory	512 MB of RAM, or more												
Hard Disk Space	about 200 MB												
Interface Port	USB 1.1 or USB 2.0												
Supported FEMTO Modules	any standard FEMTO amplifier or photoreceiver with 25 pin D-Sub socket, except model HLVA-100												
Optional Requirements	<p>For development of own application programs an additional development environment like LabVIEW Version 8 (or higher) or C/C++ is required.</p>												
Legal Notice	<p>LabVIEW, CVI, National Instruments and NI are trademarks of National Instruments. Neither FEMTO Messtechnik GmbH, nor any software programs or other goods or services offered by FEMTO Messtechnik GmbH, are affiliated with, endorsed by, or sponsored by National Instruments.</p> <p>The mark LabWindows is used under a license from Microsoft Corporation.</p> <p>Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.</p> <p>FEMTO and the FEMTO logo are trademarks or registered trademarks of FEMTO Messtechnik GmbH in Germany, the U.S. and/or other countries.</p> <p>Product and company names mentioned may also be trademarks or trade names of their respective companies used here for identification purposes only.</p>												

USB to D-Sub Control Interface for FEMTO Amplifiers

Dimensions

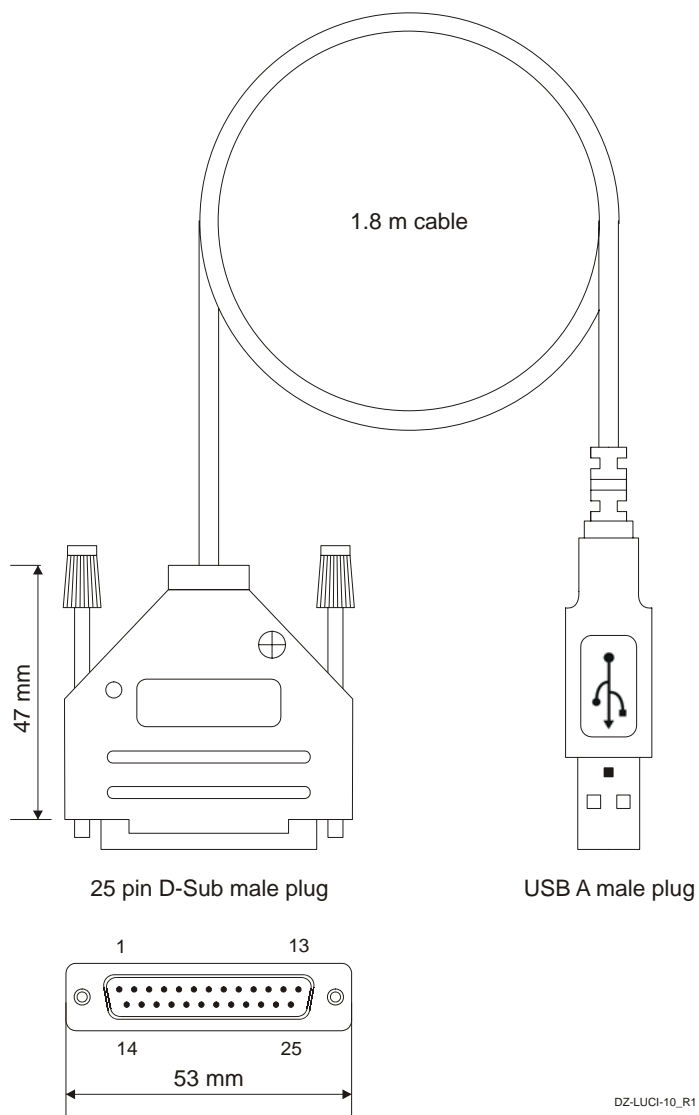

FEMTO Messtechnik GmbH
 Paul-Lincke-Ufer 34
 D-10999 Berlin · Germany
 Tel.: +49 (0)30 – 4 46 93 86
 Fax: +49 (0)30 – 4 46 93 88
 e-mail: info@femto.de
<http://www.femto.de>

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
 © by FEMTO Messtechnik GmbH
 Printed in Germany