




Datasheet

OE-300-IN-01

200 MHz Variable Gain Photoreceiver

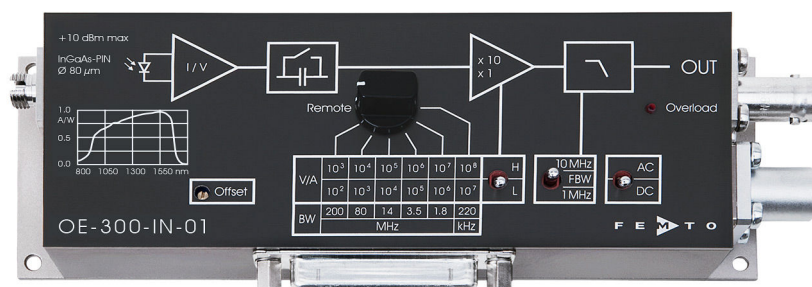

The image shows model OE-300-IN-01-FC.


Features

- Adjustable transimpedance gain from 10^2 to 10^8 V/A
- Wide bandwidth up to 200 MHz
- InGaAs-PIN photodiode covering the 900 to 1700 nm wavelength range
- FC fiber optic input
- High dynamic input range up to 10 mW optical power
- Very low noise, NEP down to 47 fW/√Hz
- Switchable low pass filters for minimizing wideband noise
- Full manual and remote control capability

Applications

- All-purpose low-noise photoreceiver (O/E converter) for the MHz range
- Time resolved optical pulse and power measurements
- Laser intensity noise measurements (RIN)
- Optical front-end for oscilloscopes, spectrum analyzers, A/D converters and RF lock-in amplifiers

Block Diagram

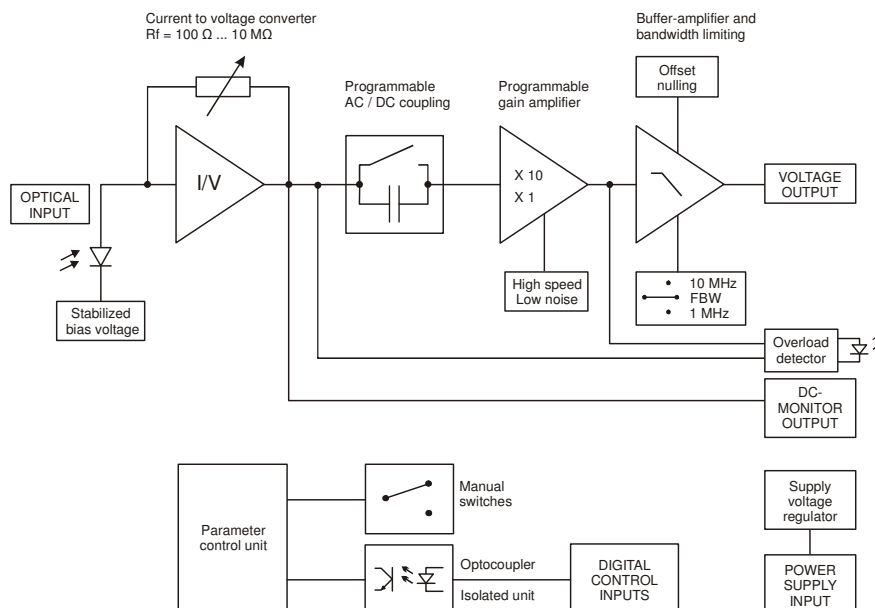

200 MHz Variable Gain Photoreceiver

Available Versions

OE-300-IN-01-FC

FC fiber optic input

Related OE-300 Models

See separate datasheets for following models on www.femto.de:

OE-300-SI-10-FST

Si-PIN, 1 mm x 1 mm, 400 - 1000 nm
1.035"-40 threaded flange

OE-300-SI-10-FS

Si-PIN, 1 mm x 1 mm, 400 - 1000 nm
25 mm dia. unthreaded flange

OE-300-SI-30-FST

Si-PIN, \varnothing 3 mm, 320 - 1000 nm
1.035"-40 threaded flange

OE-300-SI-30-FS

Si-PIN, \varnothing 3 mm, 320 - 1000 nm
25 mm dia. unthreaded flange

OE-300-IN-03-FST

InGaAs-PIN, \varnothing 300 μ m, 800 - 1700 nm
1.035"-40 threaded flange

OE-300-IN-03-FS

InGaAs-PIN, \varnothing 300 μ m, 800 - 1700 nm
25 mm dia. unthreaded flange

OE-300-S

customized versions available on request

Available Accessories

PRA-PAP



post adapter plate,
easy to mount on
FEMTO photoreceiver series
OE, FWPR, HCA-S and LCA-S

PS-15



power supply,
input: 100 - 240 VAC,
output: \pm 15 VDC, +400/-250 mA

LUCI-10



compact digital I/O interface for USB remote control,
supports opto-isolation of amplifier signal path from PC
USB port, 16 digital outputs, 3 opto-isolated digital inputs,
bus-powered operation

200 MHz Variable Gain Photoreceiver

Specifications	Test conditions	$V_s = \pm 15 \text{ V}$, $T_A = 25 \text{ }^\circ\text{C}$, system impedance = $50 \text{ } \Omega$					
Gain	Transimpedance gain	$1 \times 10^2 \dots 1 \times 10^8 \text{ V/A}$					
	Gain accuracy	$\pm 1 \text{ } \%$					
Frequency Response	Lower cut-off frequency	DC/100 Hz, switchable					
	Upper cut-off frequency	up to 200 MHz (see table below), switchable to 1 MHz or 10 MHz					
Input	Noise equivalent power (NEP)	see table below					
	Max. CW saturation power	see table below					
Detector	Detector	InGaAs-PIN photodiode					
	Active area	Integrated ball lens, suitable for fibers up to 62.5 μm core diameter					
	Spectral response	900 - 1700 nm					
	Sensitivity R	0.95 A/W typ. @ 1550 nm					
	Dark current	0.02 nA typ.					
Performance Depending on Gain Setting	Gain setting (low noise) (V/A)	10^2	10^3	10^4	10^5	10^6	10^7
	Upper cut-off frequency (–3 dB)	200 MHz	80 MHz	14 MHz	3.5 MHz	1.8 MHz	220 kHz
	NEP ($1/\sqrt{\text{Hz}}$, @ 1550 nm)	180 pW	22 pW	1.9 pW	390 fW	140 fW	50 fW
	Measured at	20 MHz	8 MHz	1.4 MHz	350 kHz	180 kHz	22 kHz
	Integrated input noise (RMS)*	4.9 μW	380 nW	23 nW	3.3 nW	0.84 nW	71 pW
	CW sat. power (@ 1550 nm)	10 mW	1.0 mW	100 μW	10 μW	1.0 μW	100 nW
	Gain setting (high speed) (V/A)	10^3	10^4	10^5	10^6	10^7	10^8
	Upper cut-off frequency (–3 dB)	175 MHz	80 MHz	14 MHz	3.5 MHz	1.8 MHz	220 kHz
	NEP ($1/\sqrt{\text{Hz}}$, @ 1550 nm)	132 pW	6.3 pW	1.4 pW	350 fW	113 fW	47 fW
	Measured at	18 MHz	8 MHz	1.4 MHz	350 kHz	180 kHz	22 kHz
	Integrated input noise (RMS)*	3.0 μW	285 nW	21 nW	3.2 nW	0.84 nW	71 pW
	CW sat. power (@ 1550 nm)	1.0 mW	100 μW	10 μW	1.0 μW	100 nW	10 nW
<p>* The integrated input noise is measured with a shaded input in the full bandwidth (“FBW”) setting (referred to 1550 nm). The measurement bandwidth is 3 x the upper cut-off frequency at the specific gain setting; filter slope is a 1st order roll-off.</p> <p>The input referred peak-peak noise can be calculated from the RMS noise as follows:</p> $P_{\text{Input noise peak-to-peak}} = P_{\text{Input noise RMS}} \times 6$ <p>The output noise is given by:</p> $U_{\text{Output noise RMS}} = P_{\text{Input noise RMS}} \times \text{gain} \times R$ $U_{\text{Output noise peak-to-peak}} = U_{\text{Output noise RMS}} \times 6 = P_{\text{Input noise RMS}} \times \text{gain} \times R \times 6$ <p>The integrated noise will be reduced considerably by setting the low pass filter to “1 MHz” or “10 MHz” instead of “FBW”. This is especially useful for continuous wave (CW) measurements.</p>							

200 MHz Variable Gain Photoreceiver

Specifications (continued)

Output

Output voltage range	± 1 V (@ 50 Ω load), for linear amplification
Output impedance	50 Ω (designed for 50 Ω load)
Slew rate	1000 V/ μ s
Max. output current	± 40 mA
Output offset compensation	adjustable by offset potentiometer and external control voltage, output offset compensation range min. ± 100 mV

Ext. Offset Control

Control voltage range	± 10 V
Offset control input impedance	15 k Ω

Indicator LED

Function	overload
----------	----------

Digital Control

Control input voltage range	LOW bit: $-0.8 \dots +1.2$ V, HIGH bit: $+2.3 \dots +12$ V
Control input current	0 mA @ 0 V, 1.5 mA @ +5 V, 4.5 mA @ +12 V
Overload output	non active: <0.4 V @ 0 ... -1 mA active: typ. 5 ... 5.1 V @ 0 ... 2 mA

Power Supply

Supply voltage	± 15 V
Supply current	$+110/-90$ mA (depends on operating conditions, recommended power supply capability min ± 200 mA)
Stabilized power supply output	± 12 V, max. 20 mA, +5 V, max. 150 mA

Case

Weight	320 g (0.74 lb.)
Material	AlMg4.5Mn, nickel-plated

DC Monitor Output

Monitor output gain	Mode	Monitor gain
	Low noise	Gain setting divided by −1
	High speed	Gain setting divided by −10
Monitor output polarity	inverting	
Monitor output voltage range	±1 V (@ ≥1 MΩ load)	
Monitor output bandwidth	DC ... 1 kHz	
Monitor output impedance	1 kΩ (designed for ≥1 MΩ load)	

Temperature Range

Storage temperature	$-40 \dots +80$ $^{\circ}$ C
Operating temperature	0 ... $+60$ $^{\circ}$ C

Absolute Maximum Ratings

Max. CW power (averaged)	12 mW
Digital control input voltage	-5 V/+16 V relative to digital ground DGND (pin 9)
Analog control input voltage	± 15 V relative to analog ground AGND (pin 3)
Power supply voltage	± 20 V

200 MHz Variable Gain Photoreceiver

Connectors

- Input

FC fiber optic receptacle
- Output

BNC jack (female)
- Power supply

Lemo® series 1S, 3-pin fixed socket
(mating plug type: FFA.1S.303.CLAC52)

Pin 1: +15 V

Pin 2: -15 V

Pin 3: GND
- Control port

Sub-D 25-pin, female, qual. class 2

Pin 1: +12 V (stabilized power supply output)

Pin 2: -12 V (stabilized power supply output)

Pin 3: AGND (analog ground for pins 1 - 8)

Pin 4: +5 V (stabilized power supply output)

Pin 5: digital output: overload (referred to pin 3)

Pin 6: DC Monitor output

Pin 7: NC (= not connected)

Pin 8: output offset control voltage input

Pin 9: DGND (ground for digital control pins 10 - 16)

Pin 10: digital control input: gain, LSB

Pin 11: digital control input: gain

Pin 12: digital control input: gain, MSB


Pin 13: digital control input: AC/DC

Pin 14: digital control input: high speed / low noise

Pin 15: upper cut-off frequency limit 10 MHz

Pin 16: upper cut-off frequency limit 1 MHz

Pin 17 - 25: NC (= not connected)



Scope of Delivery

OE-300-IN-01-FC, Lemo® 3-pin connector, datasheet, transport package

200 MHz Variable Gain Photoreceiver

Remote Control Operation

General

Remote control input bits are opto-isolated and connected by a logical OR function to the local switch settings. For remote control set the corresponding local switches to "Remote", "AC" and "H" and select the desired setting via a bit code at the corresponding digital inputs. Mixed operation, e.g. local AC/DC setting and remote controlled gain setting, is also possible.

Gain setting

Low noise Gain (V/A) Pin 14=HIGH	High speed Gain (V/A) Pin 14=LOW	Pin 12 MSB	Pin 11	Pin 10 LSB
10^2	10^3	LOW	LOW	LOW
10^3	10^4	LOW	LOW	HIGH
10^4	10^5	LOW	HIGH	LOW
10^5	10^6	LOW	HIGH	HIGH
10^6	10^7	HIGH	LOW	LOW
10^7	10^8	HIGH	LOW	HIGH

AC/DC setting

Coupling	Pin 13
DC	LOW
AC	HIGH


Low pass filter setting

Upper cut-off freq. limit	Pin 15	Pin 16
full bandwidth	LOW	LOW
10 MHz	HIGH	LOW
1 MHz	LOW	HIGH

High speed / low noise setting

Mode	Pin 14
low noise mode	LOW
high speed mode	HIGH

Spectral Responsivity

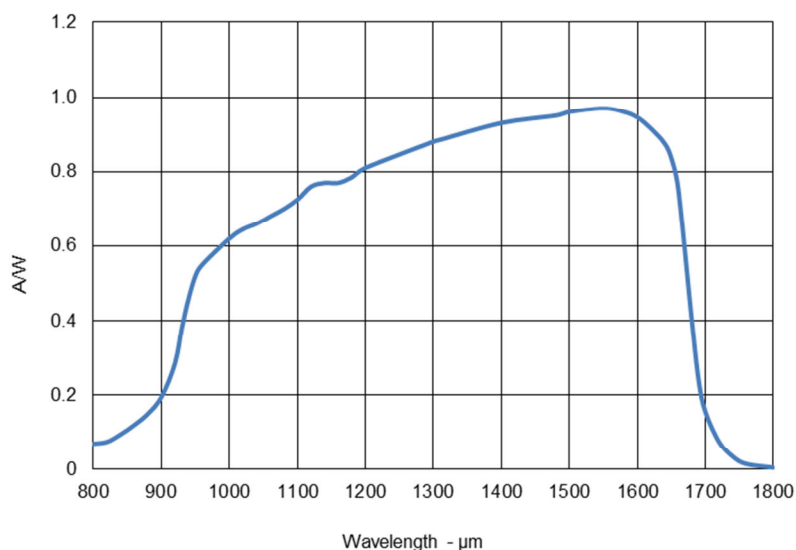


200 MHz Variable Gain Photoreceiver

Typical Performance
Characteristic


Frequency response

$$V_{\text{Supply}} = \pm 15 \text{ V}_{\text{DC}}; R_{\text{Load}} = 50 \Omega$$


Gain setting: $L10^2, H10^3$




Gain setting: $L10^3, H10^4$




Gain setting: $L10^4, H10^5$




Gain setting: $L10^5, H10^6$



Gain setting: $L10^6, H10^7$



Gain setting: $L10^7, H10^8$




200 MHz Variable Gain Photoreceiver


Typical Performance
Characteristic (continued)

Input noise equivalent power (NEP)


Gain setting $L10^2, H10^3$

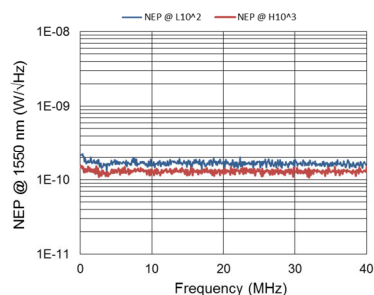


Gain setting $L10^3, H10^4$

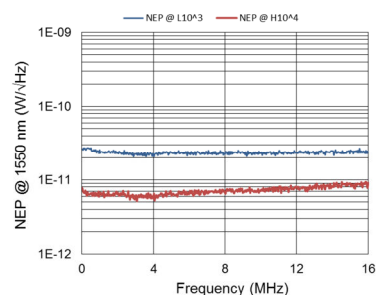


Gain setting: $L10^4, H10^5$

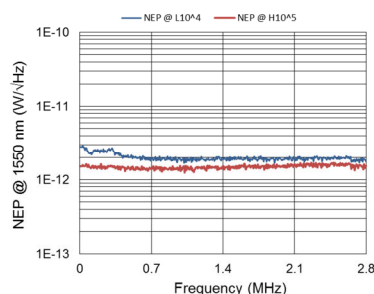


Gain setting: $L10^5, H10^6$

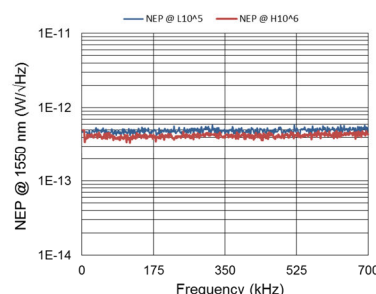

Gain setting: $L10^6, H10^7$

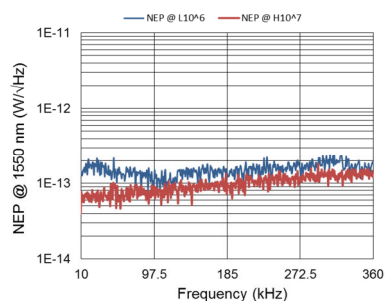

Gain setting: $L10^7, H10^8$

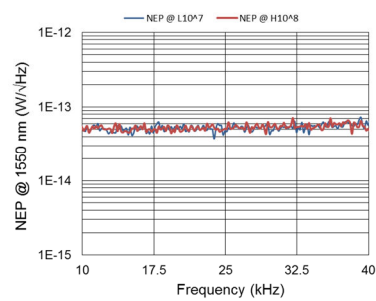


200 MHz Variable Gain Photoreceiver

Typical Performance
Characteristic (continued)


Signal pulse response

Gain setting $L10^2$

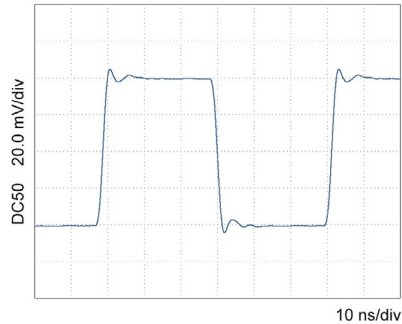


Rise: 1.84 ns Fall: 1.90 ns

Gain setting $H10^3$

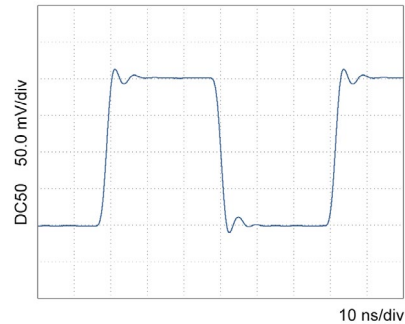


Rise: 2.27 ns Fall: 2.32 ns

Gain setting $L10^3$

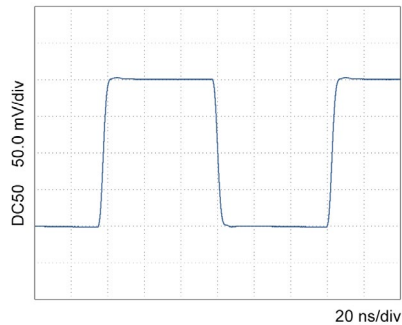


Rise: 3.30 ns Fall: 3.41 ns

Gain setting $H10^4$

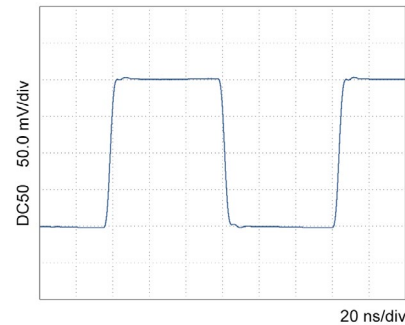


Rise: 3.44 ns Fall: 3.52 ns

Gain setting $L10^4$

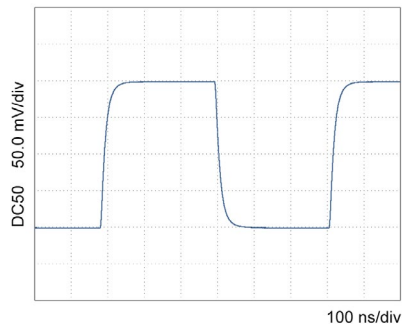

Rise: 26.42 ns Fall: 26.49 ns

Gain setting $H10^5$

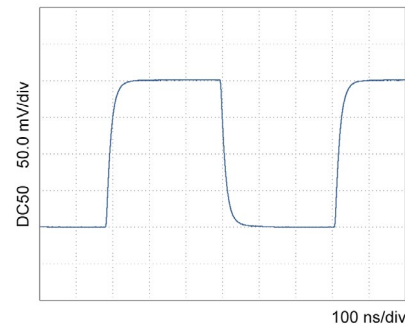


Rise: 26.77 ns Fall: 27.01 ns


200 MHz Variable Gain Photoreceiver

Typical Performance
Characteristic (continued)


Gain setting L10⁵

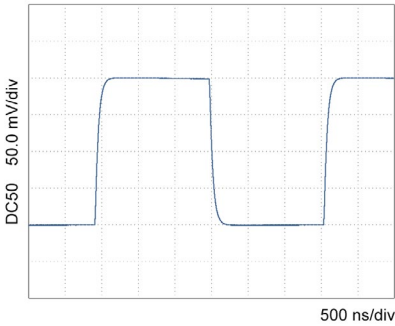


Gain setting H10⁶

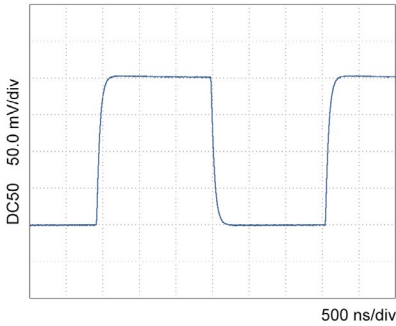


Gain setting L10⁶

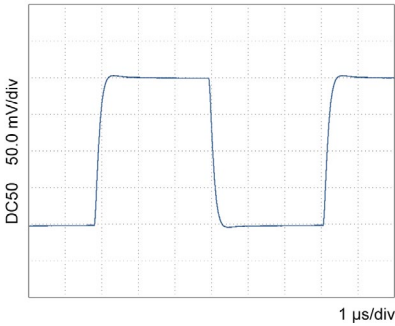


Gain setting H10⁷

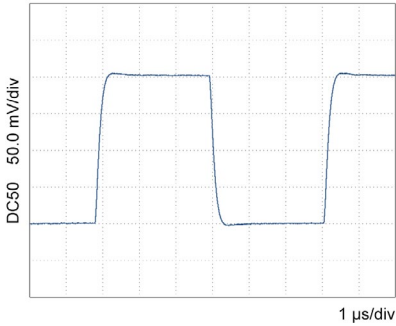

Gain setting L10⁷

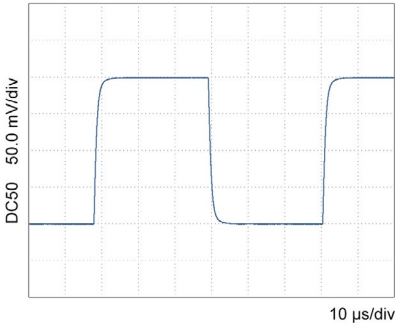


Gain setting H10⁸

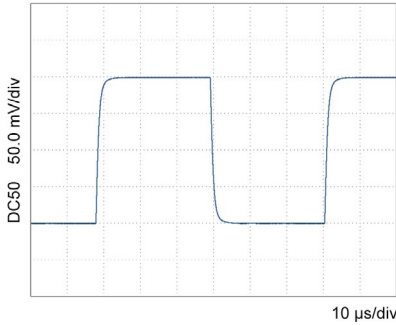

200 MHz Variable Gain Photoreceiver

Dimensions

Fiber optic input OE-300-IN-01-FC:

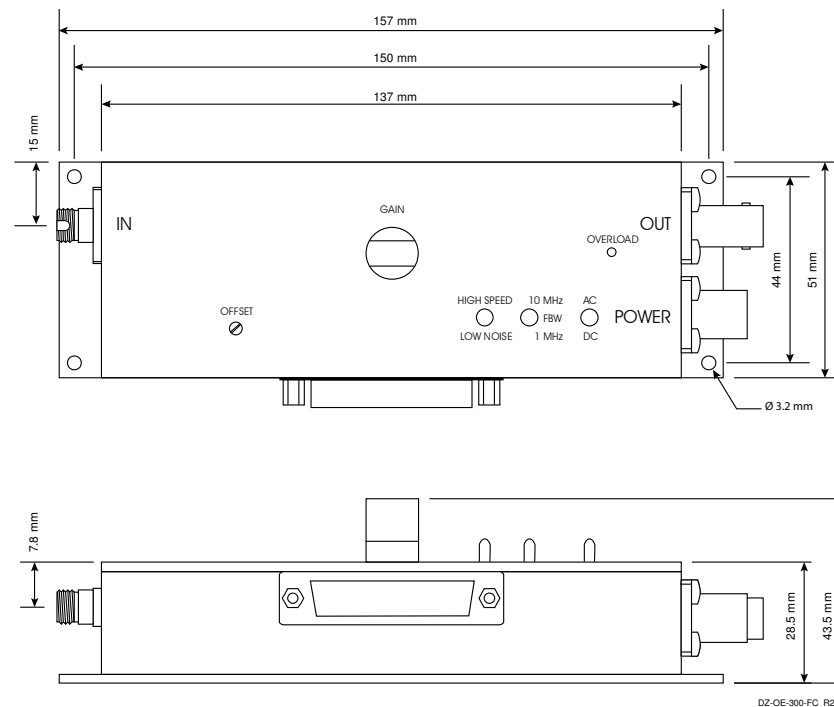

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany