




Datasheet


HSA-X-1-40

1.2 GHz High-Speed Amplifier

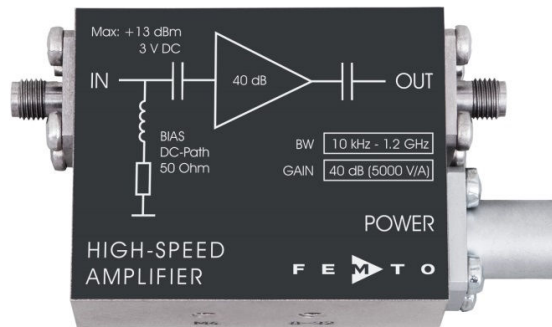

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------|--|---|--|--|------|------|---------------|---------------------|----------------------------------|---------------|--------------------|--------------------|---------------------------------|------------------------|---------------------------------|-------------------------|------------------------------|--------|-------|--------------------|-------------|--------------------|-------------|--------------------------|-----------------------------------|--------------------------------|---|------------|----------------------------------|-------------------|--------------------------------|
| Features | <ul style="list-style-type: none"> • Bandwidth 10 kHz ... 1.2 GHz • Rise time 290 ps • Gain 40 dB • Noise figure 1.7 dB • Integrated bias circuit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Applications | <ul style="list-style-type: none"> • Preamplifier for ultra-fast detectors (microchannel-plates, photomultipliers, avalanche-photodiodes and PIN-photodiodes) • Oscilloscope and transient-recorder preamplifier • Time-resolved pulse and transient measurements | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Block Diagram | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Specifications | <table border="0"> <tr> <td>Test conditions</td> <td colspan="2">$V_s = + 15 \text{ V}$, $T_A = 25^\circ\text{C}$, system impedance = 50Ω</td> </tr> <tr> <td rowspan="3">Gain</td> <td>Gain</td> <td>40 dB (x 100)</td> </tr> <tr> <td>Transimpedance gain</td> <td>5,000 V/A (40 dB x 50Ω)</td> </tr> <tr> <td>Gain accuracy</td> <td>$\pm 1 \text{ dB}$</td> </tr> <tr> <td rowspan="3">Frequency Response</td> <td>Lower cut-off frequency (-3 dB)</td> <td>10 kHz ($\pm 20 \%$)</td> </tr> <tr> <td>Upper cut-off frequency (-3 dB)</td> <td>1.2 GHz ($\pm 15 \%$)</td> </tr> <tr> <td>Rise/fall time (10 % - 90 %)</td> <td>290 ps</td> </tr> <tr> <td rowspan="6">Input</td> <td>DC input impedance</td> <td>50Ω</td> </tr> <tr> <td>RF input impedance</td> <td>50Ω</td> </tr> <tr> <td>50Ω noise figure</td> <td>1.7 dB (@ $f < 700 \text{ MHz}$)</td> </tr> <tr> <td>Equivalent input voltage noise</td> <td>310 pV/$\sqrt{\text{Hz}}$ (@ $f < 700 \text{ MHz}$)</td> </tr> <tr> <td>Input VSWR</td> <td>1.6 : 1 (@ $f < 2 \text{ GHz}$)</td> </tr> <tr> <td>Input return loss</td> <td>13 dB (@ $f < 2 \text{ GHz}$)</td> </tr> </table> | Test conditions | $V_s = + 15 \text{ V}$, $T_A = 25^\circ\text{C}$, system impedance = 50Ω | | Gain | Gain | 40 dB (x 100) | Transimpedance gain | 5,000 V/A (40 dB x 50Ω) | Gain accuracy | $\pm 1 \text{ dB}$ | Frequency Response | Lower cut-off frequency (-3 dB) | 10 kHz ($\pm 20 \%$) | Upper cut-off frequency (-3 dB) | 1.2 GHz ($\pm 15 \%$) | Rise/fall time (10 % - 90 %) | 290 ps | Input | DC input impedance | 50Ω | RF input impedance | 50Ω | 50Ω noise figure | 1.7 dB (@ $f < 700 \text{ MHz}$) | Equivalent input voltage noise | 310 pV/ $\sqrt{\text{Hz}}$ (@ $f < 700 \text{ MHz}$) | Input VSWR | 1.6 : 1 (@ $f < 2 \text{ GHz}$) | Input return loss | 13 dB (@ $f < 2 \text{ GHz}$) |
| Test conditions | $V_s = + 15 \text{ V}$, $T_A = 25^\circ\text{C}$, system impedance = 50Ω | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Gain | Gain | 40 dB (x 100) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Transimpedance gain | 5,000 V/A (40 dB x 50Ω) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Gain accuracy | $\pm 1 \text{ dB}$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Frequency Response | Lower cut-off frequency (-3 dB) | 10 kHz ($\pm 20 \%$) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Upper cut-off frequency (-3 dB) | 1.2 GHz ($\pm 15 \%$) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Rise/fall time (10 % - 90 %) | 290 ps | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Input | DC input impedance | 50Ω | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | RF input impedance | 50Ω | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 50Ω noise figure | 1.7 dB (@ $f < 700 \text{ MHz}$) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Equivalent input voltage noise | 310 pV/ $\sqrt{\text{Hz}}$ (@ $f < 700 \text{ MHz}$) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input VSWR | 1.6 : 1 (@ $f < 2 \text{ GHz}$) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input return loss | 13 dB (@ $f < 2 \text{ GHz}$) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

1.2 GHz High-Speed Amplifier
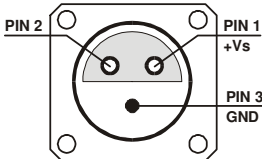
| | |
|---------------------------------|---|
| <p>Output</p> | <p>Output impedance 50 Ω</p> <p>Output VSWR 1.35 : 1 (@ f < 1.2 GHz)</p> <p>Output return loss 16.5 dB (@ f < 1.2 GHz)</p> <p>Output power P_{1dB} +12.5 dBm (@ f < 500 MHz)</p> <p>Output peak-to-peak voltage 2.0 V_{pp} (@ f < 500 MHz, for linear amplification)</p> <p>Output noise typ. 2.1 mV_{RMS} or 14 mV_{pp}* (measurement BW: 4 GHz)</p> <p>* The peak-to-peak output noise is derived from the RMS noise as follows: V_{pp} = V_{RMS} × 6.6 (99.9% of the time the output noise voltage will be within the specified peak-to-peak value.)</p> |
| <p>Power Supply</p> | <p>Supply voltage +15 V</p> <p>Supply current +140 mA</p> |
| <p>Case</p> | <p>Weight 100 g (0.23 lbs)</p> <p>Material AIMg4.5Mn, nickel-plated</p> |
| <p>Temperature Range</p> | <p>Storage temperature -40 ... +100 °C</p> <p>Operating ambient temperature 0 ... +60 °C</p> |
| <p>Absolute Maximum Ratings</p> | <p>Power supply voltage +18.5 V</p> <p>DC and LF input voltage ±3 V</p> <p>RF input power +13 dBm</p> |
| <p>Connectors</p> | <p>Input SMA, jack (female)</p> <p>Output SMA, jack (female)</p> <p>Power supply Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)</p> <p>Pin 1: +15 V</p> <p>Pin 2: NC</p> <p>Pin 3: GND</p>  |

1.2 GHz High-Speed Amplifier

Dimensions

