



Datasheet

HBPR-100M-60K-IN-FST

High-Speed Balanced Photoreceiver




Features

- **Bandwidth DC to 100 MHz**
- **Common-Mode Rejection Ratio (CMRR) 50 dB typ.**
- **InGaAs-PIN detectors, 0.3 mm active diameter**
- **Spectral range 800 – 1700 nm**
- **Very low NEP, down to 3.7 pW/√Hz**
- **Transimpedance gain switchable 20×10^3 V/A, 60×10^3 V/A**
- **High dynamic input range up to 2×10 mW balanced optical power**
- **Fast monitor outputs with 10 MHz bandwidth and 1×10^3 V/A gain**
- **Switchable low pass filter for minimizing wideband noise**
- **Free-space input 1.035"-40 threaded**
- **UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread**


Applications

- **Spectroscopy**
- **Heterodyne detection**
- **Optical coherence tomography (OCT)**
- **Optical delay measurement**
- **Differential optical front-end for oscilloscopes, spectrum analyzers, A/D converters and RF lock-in amplifiers**

Block Diagram

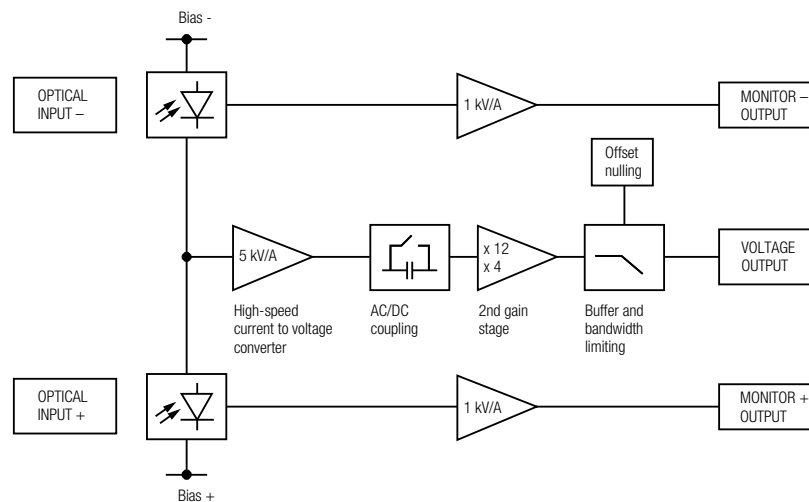

High-Speed Balanced Photoreceiver

| | |
|--|---|
| <p>Intended Use</p> | <p>The HBPR-100M-60K-IN-FST photoreceiver consists of a combination of two anti-parallel connected photodiodes with a subsequent low-noise transimpedance amplifier. It is designed for fast conversion of the tiny difference of two optical signals into an equivalent output voltage. Operation is mostly self-explanatory. If in doubt, consult this document or contact support@femto.de.</p> <p>For safe operation, please refer to the damage thresholds specified in the "Absolute Maximum Ratings", "Temperature Range" and "Power Supply" sections of this document.</p> <p>The operating environment must be free of smoke, dust, grease, oil, condensing moisture, and other contaminants that could affect the operation or performance.</p> |
| <p>Application Notes</p> | <p>The damage threshold of 12 mW for each photodiode mentioned in the "Absolute Maximum Ratings" section applies to reasonably homogeneous illumination of the photodiodes. Extreme focusing of the light beam can lead to damage to the photodiodes, even at significantly lower light power.</p> <p>To achieve optimum performance, it is recommended that the CW light intensity at both inputs be well balanced. The monitor outputs can be used for continuous balance control. For setups with arbitrarily varying CW offset, the photoreceiver's AC mode can be helpful. Using AC mode increases the CW offset range to 275 μW (@ 1550 nm), regardless of the gain setting.</p> |
| <p>Available Version</p> | <p>HBPR-100M-60K-IN-FST</p>  <p>1.035"-40 threaded flanges with internally threaded coupler rings mounted (outer dia. 30 mm), for free space applications, compatible with many optical standard accessories</p> |
| <p>Related Models</p> <p>Si Versions</p> | <p>Various free space or fiber coupled HBPR models, with bandwidth up to 500 MHz, in the spectral range from 320 nm to 1700 nm are available.</p> <p>Fiber-coupled with fix/permanent FC fiber connectors</p> <p>HBPR-100M-60K-SI-FC Si-PIN \varnothing 0.8 mm, DC – 100 MHz, 320 – 1000 nm, CMRR 50 dB, gain $2.0 \times 10^4 / 6.0 \times 10^4$ V/A switchable</p> <p>HBPR-200M-30K-SI-FC Si-PIN \varnothing 0.8 mm, DC – 200 MHz, 320 – 1000 nm, CMRR 45 dB, gain $1.0 \times 10^4 / 3.0 \times 10^4$ V/A switchable</p> <p>HBPR-500M-10K-SI-FC Si-PIN \varnothing 0.4 mm, DC – 500 MHz, 320 – 1000 nm, CMRR 40 dB, gain $5.0 \times 10^3 / 10.0 \times 10^3$ V/A switchable</p> <p>Free space versions with 1.035"-40 threaded flanges</p> <p>HBPR-100M-60K-SI-FST Si-PIN \varnothing 0.8 mm, DC – 100 MHz, 320 – 1000 nm, CMRR 50 dB, gain $2.0 \times 10^4 / 6.0 \times 10^4$ V/A switchable</p> <p>HBPR-200M-30K-SI-FST Si-PIN \varnothing 0.8 mm, DC – 200 MHz, 320 – 1000 nm, CMRR 45 dB, gain $1.0 \times 10^4 / 3.0 \times 10^4$ V/A switchable</p> <p>HBPR-500M-10K-SI-FST Si-PIN \varnothing 0.4 mm, DC – 500 MHz, 320 – 1000 nm, CMRR 40 dB, gain $5.0 \times 10^3 / 10.0 \times 10^3$ V/A switchable</p> |

High-Speed Balanced Photoreceiver

Related Models (continued)

InGaAs Versions

| | |
|---|---|
| Fiber-coupled with fix/permanent FC fiber connectors (ball lense coupled) | |
| HBPR-100M-60K-IN-FC | InGaAs-PIN \varnothing 0.08 mm, DC – 100 MHz, 900 – 1700 nm, CMRR 55 dB, gain $2.0 \times 10^4 / 6.0 \times 10^4$ V/A switchable |
| HBPR-200M-30K-IN-FC | InGaAs-PIN \varnothing 0.08 mm, DC – 200 MHz, 900 – 1700 nm, CMRR 50 dB, gain $1.0 \times 10^4 / 3.0 \times 10^4$ V/A switchable |
| HBPR-500M-10K-IN-FC | InGaAs-PIN \varnothing 0.08 mm, DC – 500 MHz, 900 – 1700 nm, CMRR 45 dB, gain $5.0 \times 10^3 / 10.0 \times 10^3$ V/A switchable |
| Free space versions with 1.035"-40 threaded flanges | |
| HBPR-200M-30K-IN-FST | InGaAs-PIN \varnothing 0.3 mm, DC – 200 MHz, 800 – 1700 nm, CMRR 45 dB, gain $1.0 \times 10^4 / 3.0 \times 10^4$ V/A switchable |
| HBPR-450M-10K-IN-FST | InGaAs-PIN \varnothing 0.3 mm, DC – 450 MHz, 800 – 1700 nm, CMRR 35 dB, gain $5.0 \times 10^3 / 10.0 \times 10^3$ V/A switchable |

Available Accessory

PS-15-25-L



Power Supply
Input: 100 – 240 VAC
Output: ± 15 VDC

Specifications

| | |
|--------------------|---|
| Test conditions | $V_s = \pm 15$ V, $T_A = 25$ °C, output load impedance 50 Ω , warm-up 20 minutes (min. 10 minutes recommended), monitor outputs terminated with 1 M Ω |
| Gain | <p>Transimpedance gain</p> <p>Gain accuracy</p> <p>Conversion gain</p> <p>Common mode rejection ratio (CMRR)</p> |
| Frequency Response | <p>Lower cut-off frequency</p> <p>Upper cut-off frequency (–3 dB)</p> |
| Time Response | <p>Rise/fall time (10 % – 90 %)</p> |
| Input | <p>Noise equivalent power (NEP)</p> <p>Maximum differential CW power (for linear amplification)</p> <p>Max. optical CW balanced power (common mode power)</p> <p>Monitor optical saturation power (limited by linear amplification)</p> |
| Detector | <p>Detector type</p> <p>Active area</p> <p>Spectral range</p> <p>Sensitivity</p> |


High-Speed Balanced Photoreceiver

Specifications (continued)

| | | |
|-------------------------|--|--|
| Output | Output voltage range Max. output voltage Offset voltage compensation Output impedance Slew rate Max. output current Output reflection S22 Output noise (typ.) | ± 1.0 V (@ 50 Ω load) for linear operation and low harmonic distortion ± 2.0 V (@ 50 Ω load) ± 100 mV typ., adjustable by offset potentiometer 50 Ω (terminate with 50 Ω load) 2000 V/ μ s 70 mA -30 dB @ < 100 MHz -20 dB @ < 800 MHz 2.2 mV _{RMS} (15 mV peak-peak) (@ 2 nd gain $\times 4$) 6.2 mV RMS (41 mV peak-peak) (@ 2 nd gain $\times 12$) 0.5 mV RMS (3.1 mV peak-peak) (@ 2 nd gain $\times 4$, BW 20 MHz) 1.3 mV RMS (8.8 mV peak-peak) (@ 2 nd gain $\times 12$, BW 20 MHz) (@ 50 Ω load, no signal on detectors, measurement bandwidth 2 GHz) |
| Monitor Outputs | Gain Voltage range Output impedance Max. output current Bandwidth Output noise | 1×10^3 V/A (@ ≥ 100 k Ω load) 0 ... +10 V (@ ≥ 100 k Ω load) 50 Ω (terminate with ≥ 100 k Ω load) 30 mA typ. DC - 10 MHz 0.6 mV RMS (4 mV peak-peak) (@ 100 k Ω load, no signal on detectors, measurement bandwidth 200 MHz) |
| Power Supply | Supply voltage Supply current | ± 15 V (± 14.5 V ... ± 16.5 V) -90 / +120 mA typ. (depends on operating conditions, recommended power supply capability min. ± 200 mA) |
| Optical Input Connector | Material FST flange Material FST coupler ring | 1.4305 stainless steel, nickel-plated 1.4305 stainless steel, glass bead blasted |
| Case | Weight Material | 410 g (0.9 lbs) including coupler rings AlMg3Mn, nickel-plated |
| Temperature Range | Storage temperature Operating temperature | -40 $^{\circ}$ C ... +85 $^{\circ}$ C 0 $^{\circ}$ C ... +60 $^{\circ}$ C |

| | | |
|--------------------------|--|--|
| Absolute Maximum Ratings | Optical input power (CW) Power supply voltage | 12 mW (on each photodiode) ± 20 V |
|--------------------------|--|--|

| | | |
|------------|---|--|
| Connectors | Inputs Outputs Power supply | 1.035"-40 threaded flanges for free space applications and for use with various types of optical standard accessories SMA jacks (female) LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52) |
|------------|---|--|

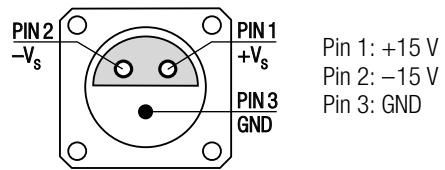

| | | |
|-------------------|---|--|
| Scope of Delivery | HBPR-100M-60K-IN-FST, 2 \times threaded coupler ring, Lemo® 3-pin connector, 3 \times adapter SMA (male) to BNC (female), datasheet | |
|-------------------|---|--|

High-Speed Balanced Photoreceiver


Ordering Information

HBPR-100M-60K-IN-FST

1.035"-40 threaded flanges for free space applications and for use with various types of optical standard accessories

Spectral Response

HBPR-100M-60K-IN-FST

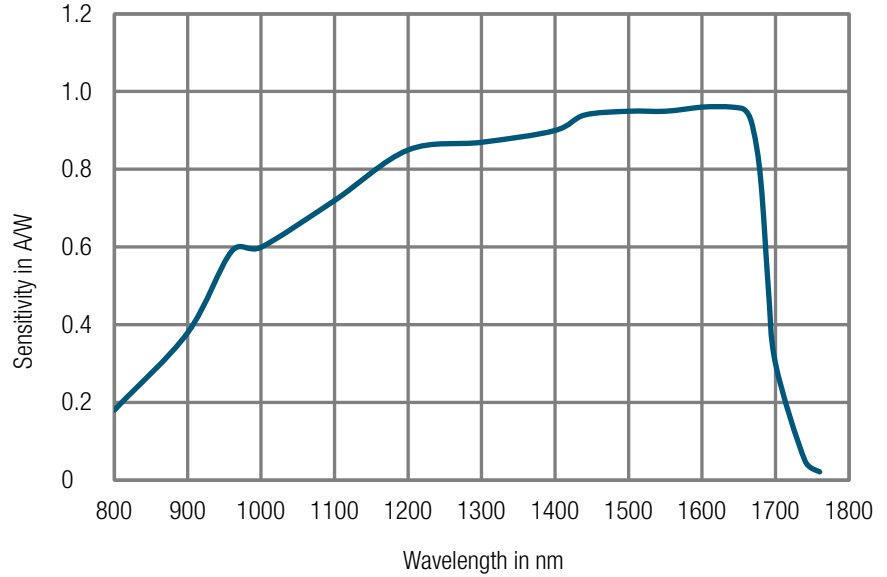


DB-Sens-HBPR-IN-FST_R2

High-Speed Balanced Photoreceiver

Dimensions

HBPR-100M-60K-IN-FST

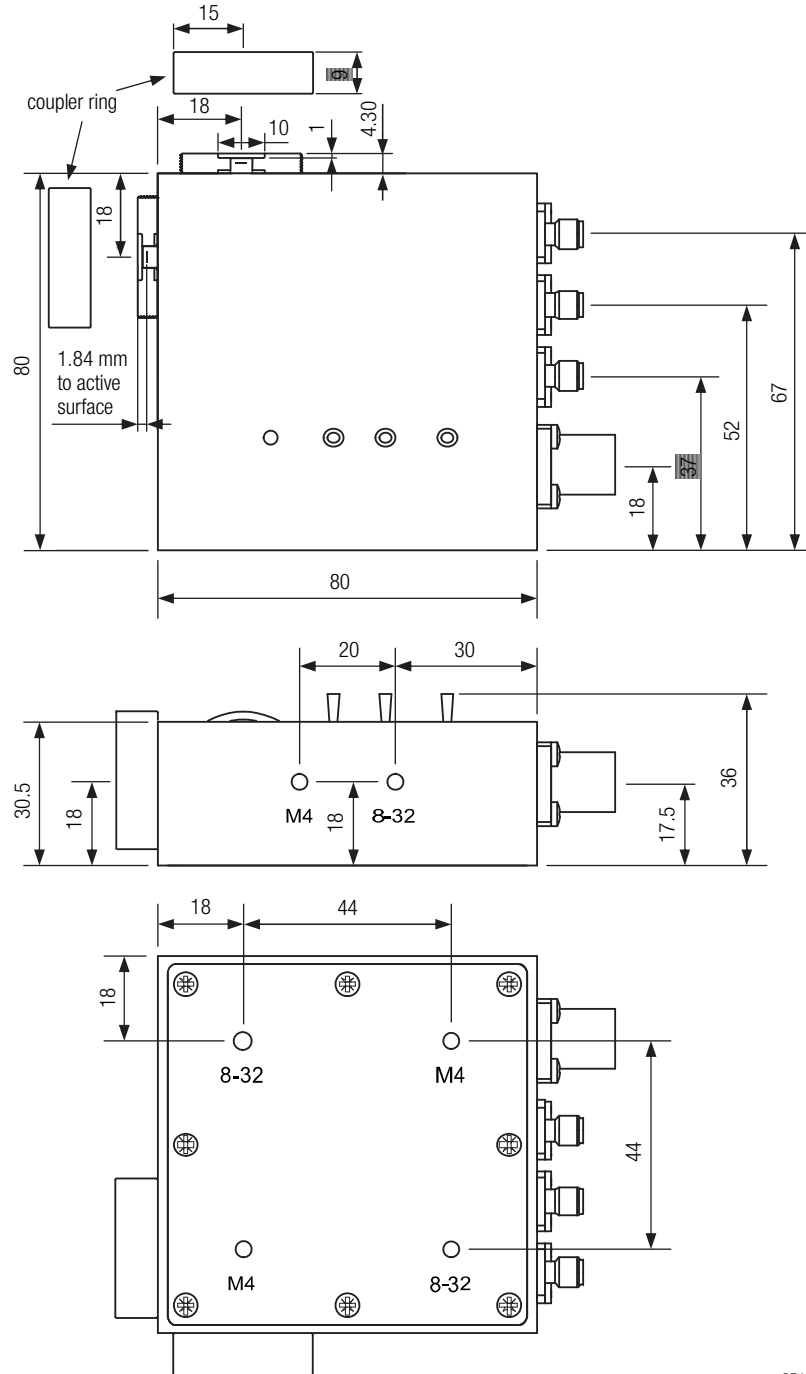

DZ-HBPR_FST_R2

all dimensions in mm unless otherwise noted

The bottom plate may be rotated to match the appropriate mounting thread to the optical axis by unscrewing the 8 screws.

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany