




T-Series High Power Laser Diode Module

M9XX±10-25-F105/15-T3

M9XX±10-30-F105/22-T3

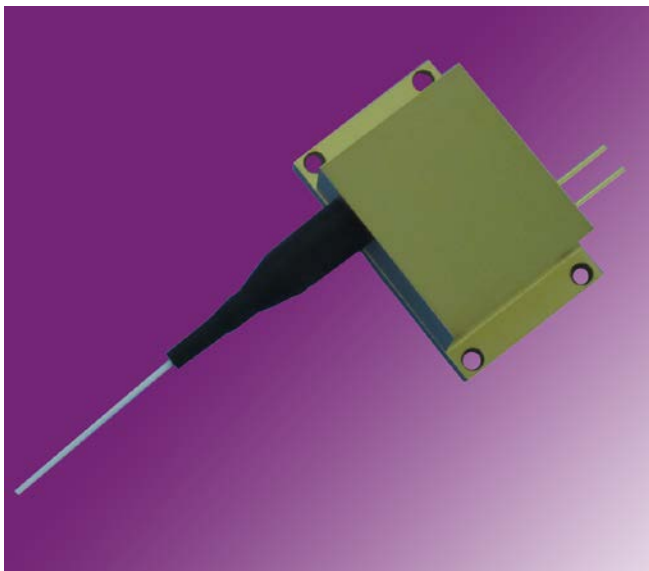

Features:

High output Power: 25W, 30W

105µm core multimode optical fiber

0.15NA,0.22NA

Fiber laser feedback protection

915nm, 940nm and other 9XX wavelength

Electrically isolated housing

Applications:



Laser pumping

Medical use

Material processing

915nm Characteristics (25°C, 25W)

— P-I Curve
- - - V-I Curve

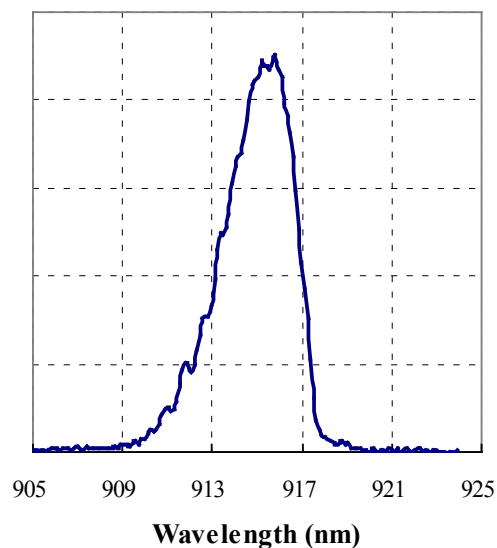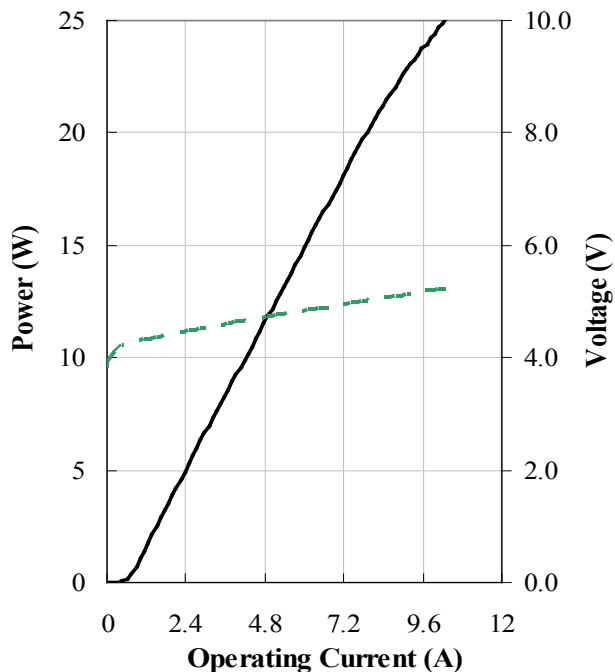

Typical Device Performance (25°C)

Parameter	Symbol	Typical		Unit	
		M9XX±10-25-F105/15-T3	M9XX±10-30-F105/22-T3		
Optical	CW Output Power	P_{op}	25	30	W
	Center Wavelength	λ_c	915, 940 and other 9XX wavelength,±10		nm
	Spectral Width (90% of Power)	$\Delta\lambda$	<6.0		nm
	Wavelength Shift with Temperature	$\Delta\lambda/\Delta T$	0.35		nm / °C
	Feedback Protection (1030-1100nm)	FP	>40		dB
Electrical	Threshold Current	I_{th}	0.65		A
	Operating Current	I_{op}	10.5	12	A
	Operating Voltage	V_{op}	5.0	5.1	V
	Slope Efficiency	η_{es}	2.7		W / A
	Power Conversion Efficiency	η_{ep}	48		%
Fiber	Fiber Core Diameter	d_{core}	105		μm
	Fiber Cladding Diameter	d_{clad}	125		μm
	Fiber Buffer Diameter	d_{buffer}	250		μm
	Numerical Aperture	NA	0.15	0.22	-
	Fiber Length	L	1.0		m

Other Parameters

Parameter	Operating Temperature /°C	Operating Relative Humidity /%	Storage Temperature /°C	Storage Relative Humidity /%	Lead Soldering Temperature, 10s max/°C
Min	10	-	-20	-	-
Max	40	75	80	90	250

Package Dimensions (mm)

Pin	Function
1	Laser(+)
2	Laser(-)

