



Datasheet

HSPR-X-I-1G4-SI

**Ultra High Speed Photoreceiver
with Si-PIN Photodiode**



The picture shows model HSPR-X-I-1G4-SI-FST.


Features

- **Si-PIN photodiode**
- **Bandwidth 10 kHz – 1.4 GHz**
- **Amplifier transimpedance gain 5.0×10^3 V/A (inverting)**
- **Max. conversion gain 2.55×10^3 V/W @ 760 nm**
- **Spectral range 320 – 1000 nm**
- **Free-space input 1.035"-40 threaded, easily convertible to fiber optic input (FC and FSMA) with optionally available screw-on adapters**
- **Fiber optic input also available as permanently mounted FC-input**
- **UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread**

Applications

- **Spectroscopy**
- **Ultra-fast pulse and transient measurements**
- **Optical triggering**
- **Optical front-end for oscilloscopes and ultra-fast A/D converters**

Block Diagram

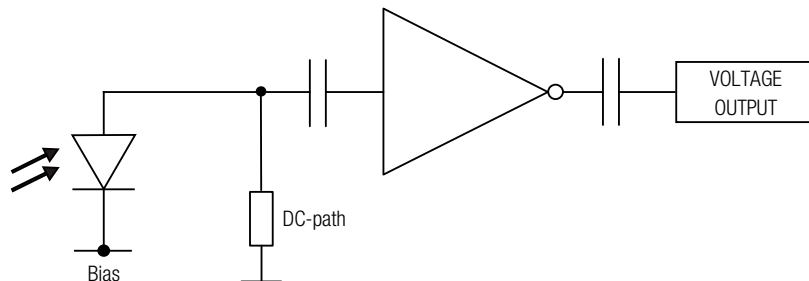

BS01-HSPR-I_R01




Intended Use

The HSPR-X-I-1G4-SI photoreceiver consists of an Si photodiode and a subsequent low-noise fixed gain amplifier. It is designed for ultra-fast conversion of small optical signals into equivalent output voltages. Operation is mostly self-explanatory. If in doubt, consult this document or contact support@femto.de.

For safe operation, please refer to the damage thresholds specified in the "Absolute Maximum Ratings", "Temperature Range" and "Power Supply" sections of this document.

The operating environment must be free of smoke, dust, grease, oil, condensing moisture, and other contaminants that could affect the operation or performance.

Ultra High Speed Photoreceiver with Si-PIN Photodiode


<p>Available Versions</p>	<p>HSPR-X-I-1G4-SI-FST</p>  <p>HSPR-X-I-1G4-SI-FC</p> 	<p>1.035"-40 threaded flange with internally threaded coupler ring (outer diameter 30 mm) for free space applications. Compatible with many optical standard accessories and for use with various types of fiber connector adapters.</p> <p>Optionally available: Fiber adapters PRA-FC, PRA-FCA and PRA-FSMA. With the relative large 0.4 mm dia. photodiode installed in the HSPR-X-I-1G4-SI input coupling is not critical. However, standard SM 9/125 fibers (PC or APC) with low numerical aperture (NA) are recommended for ensuring near 100% coupling efficiency.</p> <p>Fix/permanent FC fiber connector for high coupling efficiency and excellent conversion gain accuracy.</p>
<p>Related Models</p>	<p>HSA-X-S-1G4-SI-FST</p> <p>HSA-X-S-1G4-SI-FC</p> <p>HSA-X-S-2G-IN-FST</p> <p>HSA-X-S-2G-IN-FC</p> <p>HSPR-X-I-2G-IN-FST</p> <p>HSPR-X-I-2G-IN-FC</p>	<p>Si-PIN, \varnothing 0.4 mm, 320 – 1000 nm, 1.4 GHz, free space input, 1.035"-40 threaded flange</p> <p>Si-PIN, integrated ball lens, 320 – 1000 nm, 1.4 GHz, FC fiber connector (fix/permanent)</p> <p>InGaAs-PIN, \varnothing 0.1 mm, 900 – 1700 nm, 2 GHz, free space input, 1.035"-40 threaded flange</p> <p>InGaAs-PIN, integrated ball lens, 900 – 1700 nm, 2 GHz, FC fiber connector (fix/permanent)</p> <p>InGaAs-PIN, \varnothing 0.1 mm, 900 – 1700 nm, 2 GHz, inverting output, free space input, 1.035"-40 threaded flange</p> <p>InGaAs-PIN, integrated ball lens, 900 – 1700 nm, 2 GHz, inverting output, FC fiber connector (fix/permanent)</p>
<p>Available Accessories</p>	<p>PRA-FC PRA-FCA PRA-FSMA</p>  <p>PS-15-25-L</p> 	<p>Fiber-adapter with external 1.035"-40 thread (suitable for FST models only).</p> <p>Power Supply Input: 100 – 240 VAC Output: \pm15 VDC</p>

Ultra High Speed Photoreceiver with Si-PIN Photodiode

Specifications	Test conditions	$V_S = +15\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$, output load impedance $50\ \Omega$, warm-up 20 minutes (min. 10 minutes recommended)
Gain	Transimpedance gain	$5.0 \times 10^3\ \text{V/A}$ (inverting, @ output load $50\ \Omega$)
	Conversion gain	$2.55 \times 10^3\ \text{V/W typ.}$ (@ 760 nm, output load $50\ \Omega$)
Frequency Response	Lower cut-off frequency (-3 dB)	10 kHz
	Upper cut-off frequency (-3 dB)	1.4 GHz ($\pm 15\%$)
Time Response	Rise/fall time (10 % – 90 %)	250 ps ($\pm 15\%$)
Input	Noise equivalent power (NEP)	19 pW/ $\sqrt{\text{Hz}}$ (@ 760 nm, 100 MHz)
	Optical saturation power	390 $\mu\text{W AC}$ (for linear amplification, @ 760 nm) 10 mW CW (to prevent saturation, @ 760 nm)
Detector	Detector	Si-PIN photodiode
	Active area (FST version)	$\varnothing 400\ \mu\text{m}$
	Active area (FC version)	integrated ball lens suitable for fibers up to 400 μm core diameter
	Spectral range	320 – 1000 nm
Output	Max. sensitivity	0.51 A/W typ. (@ 760 nm)
	Output voltage range	2.0 V peak-peak (@ $50\ \Omega$ output load) for linear operation and low harmonic distortion
	Output reflection S22	-15.5 dB (@ $f < 2.5\ \text{GHz}$)
	Output impedance	$50\ \Omega$ (terminate with $50\ \Omega$ load)
	Output noise	2.5 mV RMS (17 mV peak-peak) typ. (@ $50\ \Omega$ load, no signal on detector, measurement bandwidth 4 GHz)
Optical Input Connector	Material FST flange	1.4305 stainless steel, nickel-plated
	Material FST coupler ring	1.4305 stainless steel, glass bead blasted
	Material FC receptacle	nickel silver
Power Supply	Supply voltage	+15 V
	Supply current	150 mA (depends on operating conditions, recommended power supply capability min. 200 mA)
Case	Weight	133 g (0.29 lbs) HSPR-X-I-1G4-SI-FST incl. coupler ring 110 g (0.24 lbs) HSPR-X-I-1G4-SI-FC
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature	-30 $^\circ\text{C}$... +85 $^\circ\text{C}$
	Operating temperature	0 $^\circ\text{C}$... +60 $^\circ\text{C}$


Absolute Maximum Ratings	Optical input power (CW)	12 mW (averaged)
	Power supply voltage	18.5 V

Ultra High Speed Photoreceiver with Si-PIN Photodiode

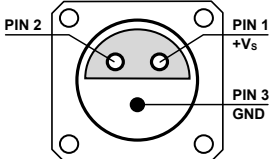Connectors	<p>Input</p> <p style="margin-left: 20px;">HSPR-X-I-1G4-SI-FST 1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories</p> <p style="margin-left: 20px;">HSPR-X-I-1G4-SI-FC FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible)</p> <p>Output</p> <p style="margin-left: 20px;">SMA jack (female)</p> <p>Power supply</p> <p style="margin-left: 20px;">LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)</p>
	<div style="display: flex; align-items: center; justify-content: center;">  <div style="margin-left: 10px;"> <p>PIN 1 +Vs</p> <p>PIN 2 NC</p> <p>PIN 3 GND</p> </div> </div> <p style="margin-left: 20px;">Pin 1: +15 V Pin 2: NC Pin 3: GND</p>

Scope of Delivery	HSPR-X-I-1G4-SI, internally threaded coupler ring (FST version only), LEMO® 3-pin connector, datasheet, transport package
-------------------	---


Ordering Information	<p>HSPR-X-I-1G4-SI-FST 1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories.</p> <p>HSPR-X-I-1G4-SI-FC FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible).</p>
----------------------	---

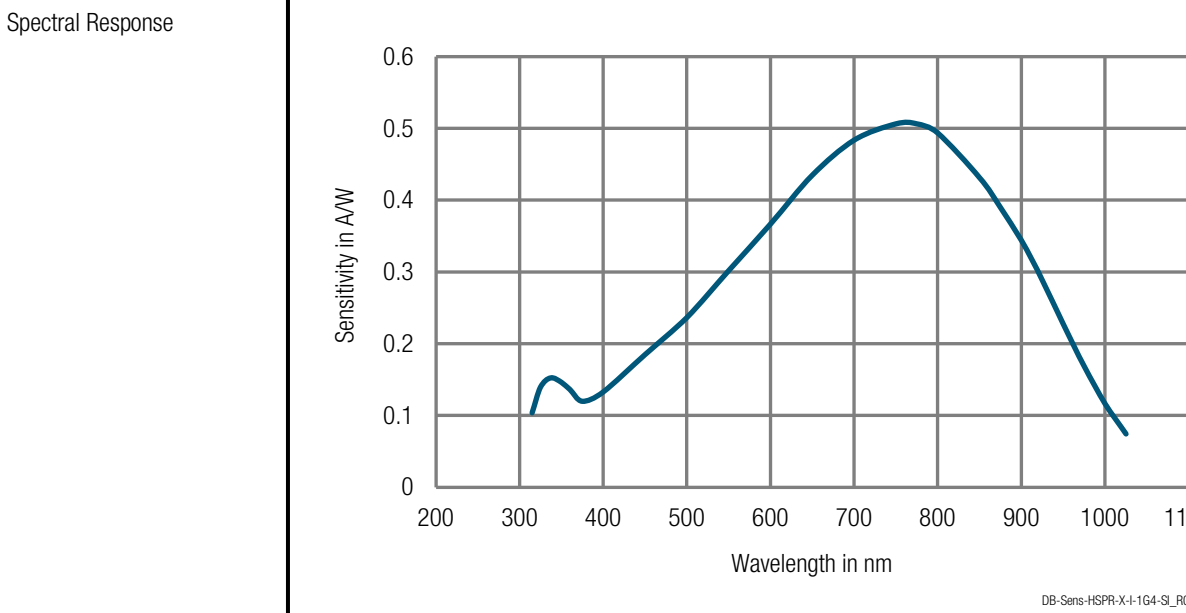

Ultra High Speed Photoreceiver with Si-PIN Photodiode

Dimensions

HSPR-X-I-1G4-SI-FST (1.035"-40 threaded free space input)

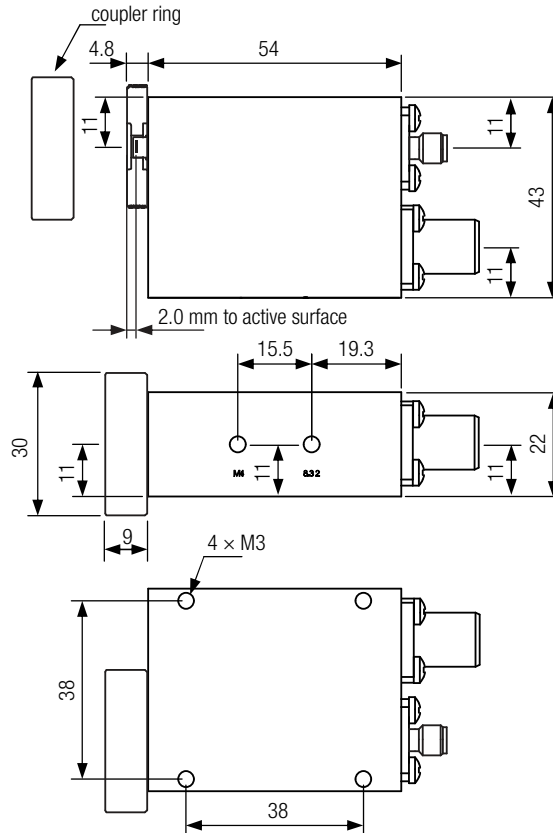


DZ-HS-FST_R1

all dimensions in mm unless otherwise noted

Ultra High Speed Photoreceiver with Si-PIN Photodiode

Dimensions (continued)

HSPR-X-I-1G4-SI-FC (FC fiber optic connector)

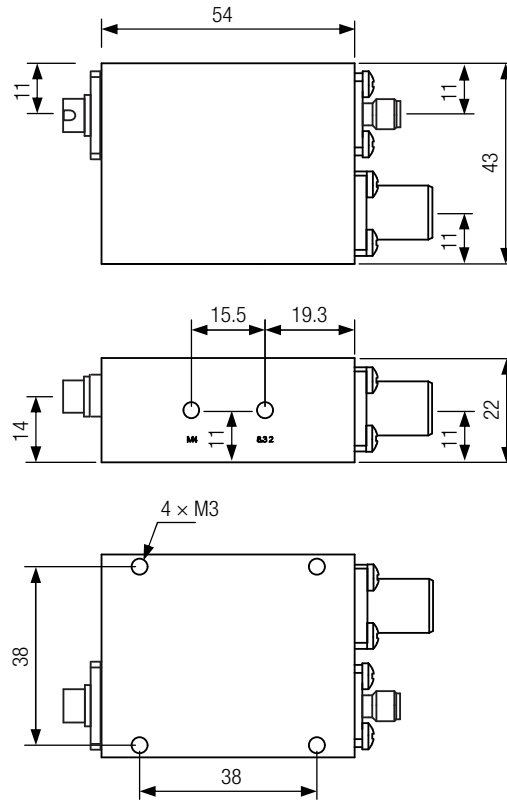

DZ-HS_FC_R1

all dimensions in mm unless otherwise noted

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany