



Electro Optical Components, Inc.

5460 Skylane Boulevard, Santa Rosa, CA 95403


Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com





808nm 6W Laser Diode Module

R808±10-6WF-09HHL-T

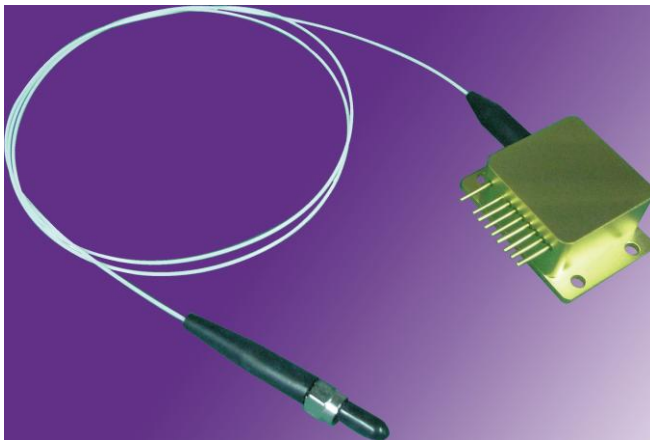

Feature
Output power: 6W
Wavelength: 808±10nm
Fiber core: 105 μm, 0.22NA
Application
Medical use
Material processing
Laser pumping

808nm 6WM Characteristics (25°C)

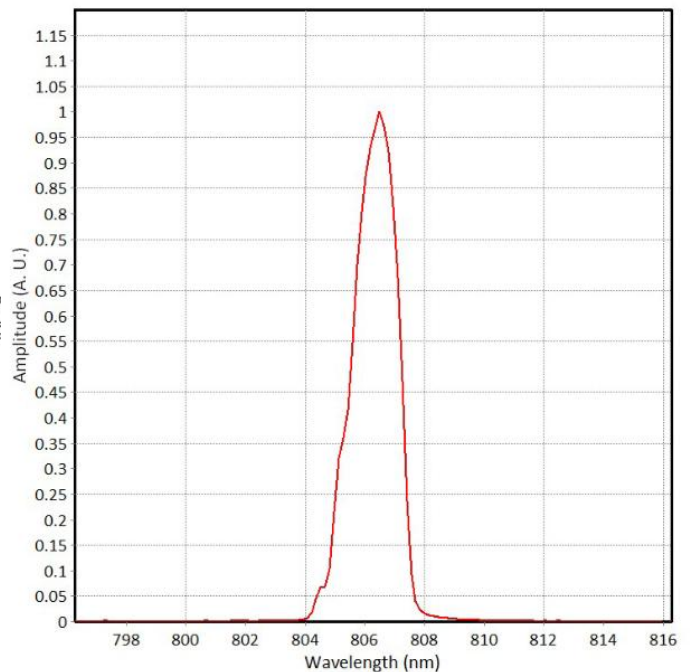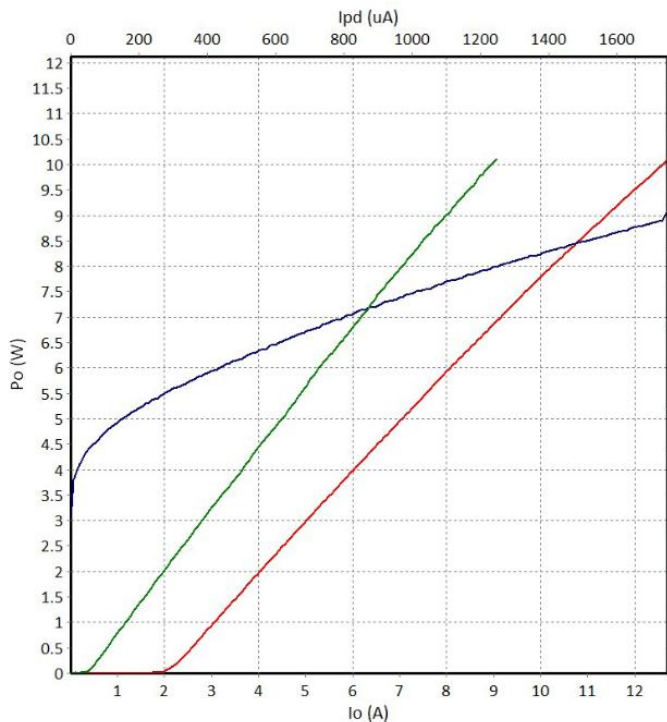

Typical Device Performance(25°C)

Parameter		Symbol	Typical Value	Unit
			R808±10-6WF-09HHL-T	
Optical	CW Output Power	P_{op}	6	W
	Center Wavelength	λ_c	808±10	nm
	Spectral Width	$\Delta\lambda$	<3	nm
	Temperature drift of wavelength	$\Delta\lambda / \Delta T$	0.3	nm/°C
Electrical	Threshold Current	I_{th}	1.34	A
	Operating Current	I_{op}	7.74	A
	Operating Voltage	V_{op}	1.96	V
	PD Current	I_{PD}	<2000	μA
	Thermistor	R_t	10±5%/3450	kΩ/β(25°C)
	TEC Max Current	I_{tmax}	6.0	A
	TEC Max Voltage	V_{tmax}	9.8	V
Fiber	Fiber Core Diameter	d_{core}	105	μm
	Fiber Cladding Diameter	d_{clad}	125	μm
	Fiber Buffer Diameter	d_{buffer}	250	μm
	Numerical Aperture	NA	0.22	-
	Connector	-	FC/P,ST,SMA905	-

Other Parameters

Parameter	Operating Temperature /°C	Operating Relative Humidity /%	Storage Temperature /°C	Storage Relative Humidity /%	Lead Soldering Temperature(max/°C)
Min	10	-	-20	-	-
Max	30	75	80	70	250(10Sec.)

Package Dimensions (mm)

Pin	Function
1	TEC(-)
2	Case
3	Laser(+)
4	Thermistor
5	Thermistor
6	Laser(-)
7	PD(P)
8	PD(N)
9	TEC(+)

