



Electro Optical Components, Inc.

5460 Skylane Boulevard, Santa Rosa, CA 95403


Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com



830nm 600mW Wavelength-stabilized Laser Diode Module

R830±0.5-600mWF-14SBTF-TG

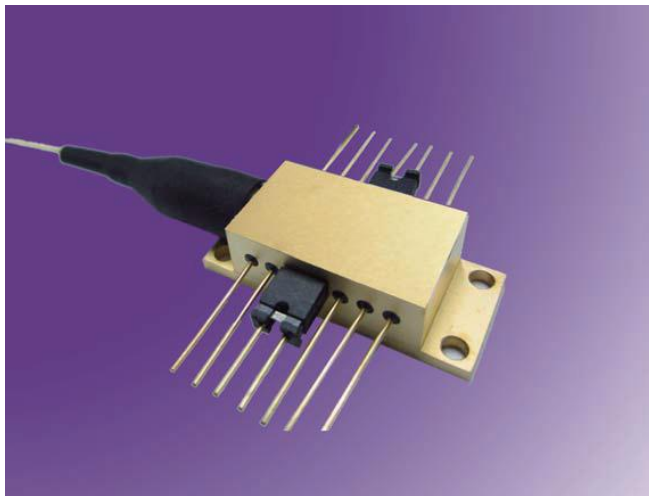

Feature

Output power: 600mW

Wavelength: 830±0.5nm

Fiber core: 105 μm, 0.22NA

Wavelength stability

Current range: 0.35~1.1A



Temperature range: 15~30°C

Application

Spectrum

Biology analysis

830nm 600mW Characteristics (25°C)

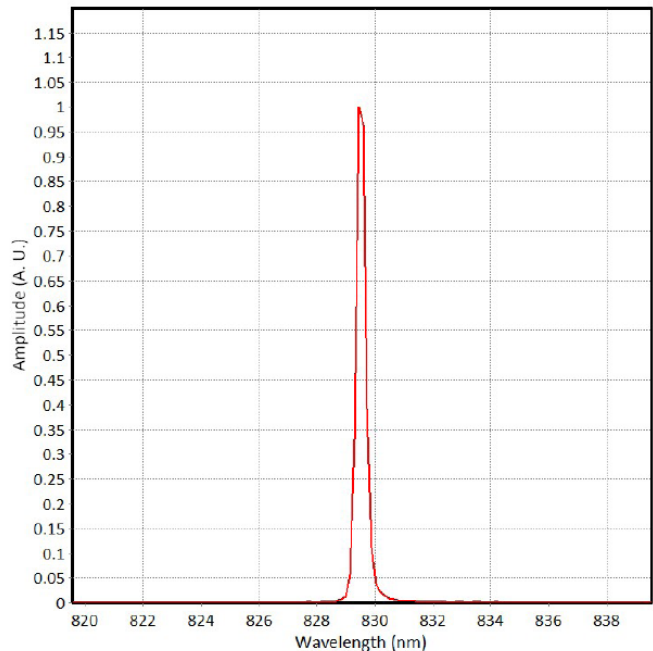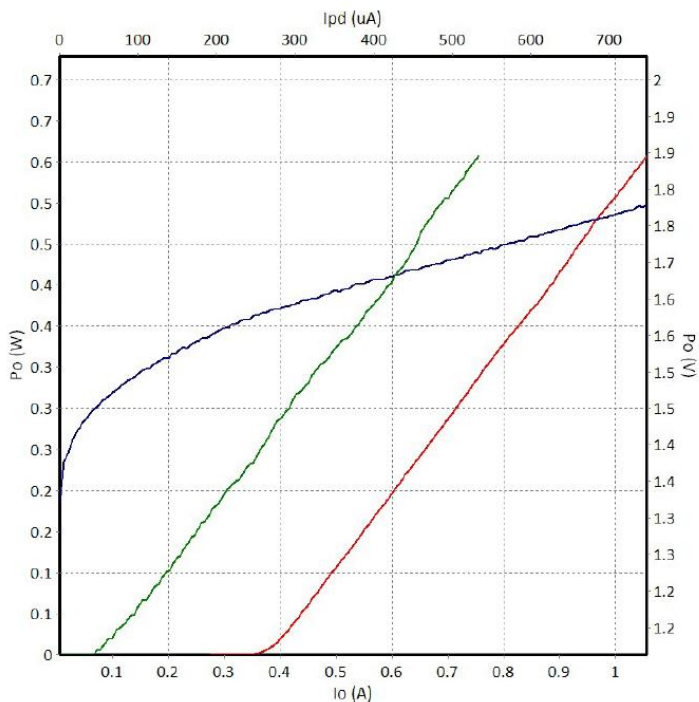

Typical Device Performance(25°C)

Parameter		Symbol	Typical Value	Unit
			R830±0.5-600mWF-14SBTF-TG	
Optical	CW Output Power	P _{op}	600	mW
	Center Wavelength	λ _c	830±0.5	nm
	Spectral Width	Δλ	≤0.1	nm
	Temperature drift of wavelength	Δλ / ΔT	0.01	nm/°C
	Current drift of wavelength	Δλ / ΔI _{op}	0.05	nm/A
Electrical	Threshold Current	I _{th}	0.38	A
	Operating Current	I _{op}	1.10	A
	Operating Voltage	V _{op}	1.84	V
	Slope Efficiency	η _{es}	0.83	W/A
	PD Parameter	I _{mo}	<2000	μA
	Thermistor	R _t	10±5%/3450	kΩ/β(25°C)
	TEC max Current	I _{max}	2.2	A
	TEC max Voltage	V _{max}	8.7	V
Fiber	Fiber Core Diameter	d _{core}	105	μm
	Numerical Aperture	NA	0.22	-
	Connector	-	FC/PC,ST,SMA905	-

Other Parameters

Parameter	Operating Temperature /°C	Operating Relative Humidity /%	Storage Temperature /°C	Storage Relative Humidity /%	Lead Soldering Temperature(max/°C)
Min	10	-	-20	-	-
Max	30	75	70	90	250(10Sec.)

Package Dimensions (mm)

Pin	Function	Pin	Function
1	TEC(+)	8	--
2	Thermistor	9	--
3	PD(P)	10	Laser(+)
4	PD(N)	11	Laser(-)
5	Thermistor	12	--
6	--	13	Case
7	--	14	TEC(-)

