



Electro Optical Components, Inc.

5460 Skylane Boulevard, Santa Rosa, CA 95403


Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com



980nm 10W Laser Diode Module

R980±10-10WD-11RTR-PFS

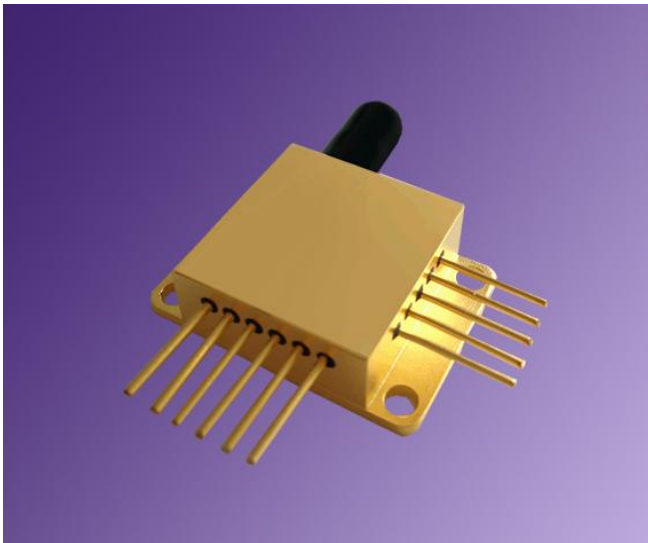

Feature

Output power: 10W

Wavelength: 980±10nm

Fiber core: 200 μm, 0.22 NA



Aiming beam: 650nm

Application

Medical use

Material processing

980nm 10W Characteristics (25°C)

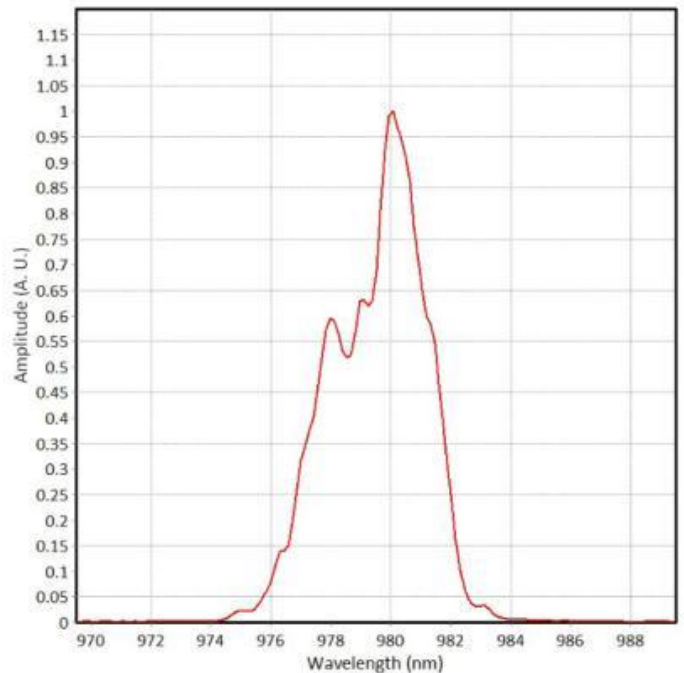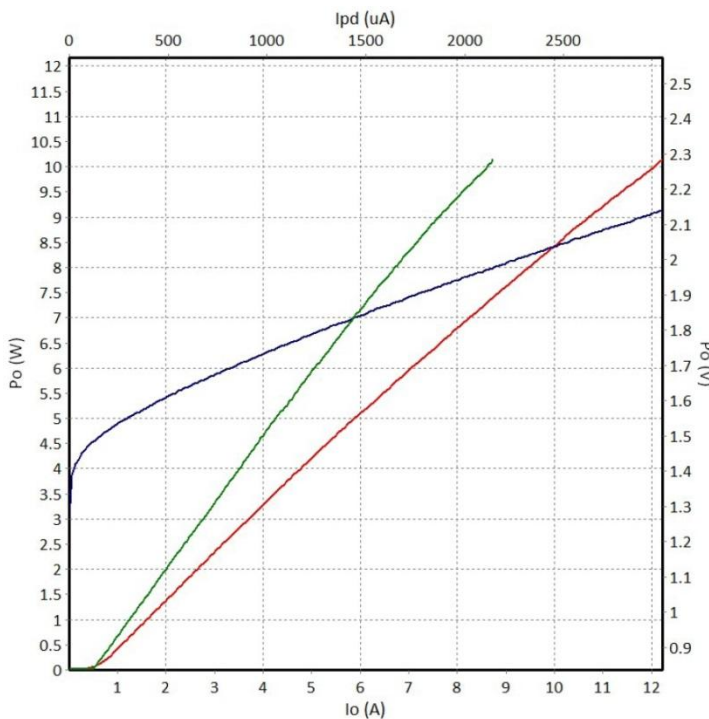

Typical Device Performance(25°C)

Parameter		Symbol	Typical Value	Unit
			R980±10-10WD-11RTR-PFS	
Optical	CW Output Power	P_{op}	10	W
	Center Wavelength	λ_c	980±10	nm
	Spectral Width	$\Delta\lambda$	≤6	nm
	Temperature drift of wavelength	$\Delta\lambda / \Delta T$	0.3	nm/°C
Aiming Beam	Output Power	P_a	2	mW
	Wavelength	λ_a	650±10	nm
	Voltage	V_a	2.2, 5.0	V
Electrical	Threshold Current	I_{th}	0.6	A
	Operating Current	I_{op}	12.05	A
	Operating Voltage	V_{op}	2.13	V
	Slope Efficiency	η_{es}	0.87	W/A
	PD Current	I_{PD}	<3000	μA
	Thermistor	R_t	10±5%/3450	kΩ/β(25°C)
Fiber	Fiber Core Diameter	d_{core}	200	μm
	Connector	-	SMA905	-

Other Parameters

Parameter	Operating Temperature /°C	Operating Relative Humidity /%	Storage Temperature /°C	Storage Relative Humidity /%	Lead Soldering Temperature(max/°C)
Min	10	-	-20	-	-
Max	30	75	80	70	250(10Sec.)

Package Dimensions (mm)

Pin	Function	Pin	Function
1	Laser(+)	7	Thermistor
2	Laser(-)	8	Thermistor
3	PD(N)	9	FCD PD(P)
4	PD(P)	10	FCD LED(-)
5	Aiming Beam LD(-)	11	FCD LED(+); FCD PD(N)
6	Aiming Beam LD(+)		

