



Datasheet

CAB-LN1

Low Noise Cable

Features

- **Minimizes triboelectric/microphonic noise**
- **Noise level reduction up to a factor of 1,000**
- **Assembled with very high quality connectors**
- **Highly shielding coaxial design**

Applications

- **Low signal current, voltage and charge measurements**
- **Scanning probe microscopy, photodetectors, ionization detectors, piezo- and pyroelectric sensors etc.**
- **For use with FEMTO low noise amplifiers. Strongly recommended for all current amplifiers with gain $\geq 10^7$ V/A**


Specifications

Electrical

Impedance	(50 ± 5) Ohm
Capacitance	96 pF/m
Insulation resistance	$\geq 10^{14}$ Ohm/m
DC resistance, inner conductor	< 800 mOhm/m
DC resistance, outer conductor	< 45 mOhm/m
Attenuation	≤ 0.1 dB/m, DC to 4 MHz

Cable Design


A Inner conductor	copper, 7 x \emptyset 0.1 mm, \emptyset 0.3 mm
B Dielectric	Polytetrafluoroethylene (PTFE), \emptyset 0.84 mm
C Coating	semi conductive, \emptyset 0.88 mm
D Shield	silver plated tensile flex braid 90 %, \emptyset 1.35 mm
E Jacket	Perfluoroalkoxy (PFA), \emptyset 1.9 mm

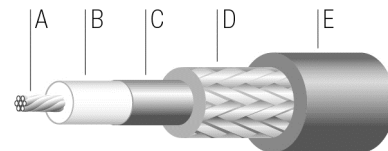

General Data

Maximum operating voltage	< 50 VAC, < 75 VDC
Temperature range	-55 °C to +200 °C
Weight	(42 ± 4) g, for length 1.0 m

Dimensions



Ordering Code

	BNC – BNC
Length	plug (male) – plug (male)
0.1 m	CAB-LN1-BB-010
0.2 m	CAB-LN1-BB-020
0.5 m	CAB-LN1-BB-050
1.0 m	CAB-LN1-BB-100
Length tolerance	+15 mm, -5 mm