



Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com



PULSABLE IR SOURCE Model EP-3964*

Helioworks, Inc. offers a unique Pulsable infrared emitter with a tungsten filament that provides mid IR radiation to over 5 microns. It can operate in pulsed or steady state mode at temperatures in excess of 1900° K in an industry standard TO-8 package.

Key features include:

- Tungsten filament
- Can be operated in pulsed or steady state mode
- Internal gold plated parabolic reflector
- Sapphire window
- Standard TO-8 package
- Expected 3 year lifetime




Electrical Specifications:

Peak Voltage = 3.5 Volts DC MAXIMUM

Peak Current = 1.0 Amp


Peak Power = 3.5 Watts

Current vs Voltage

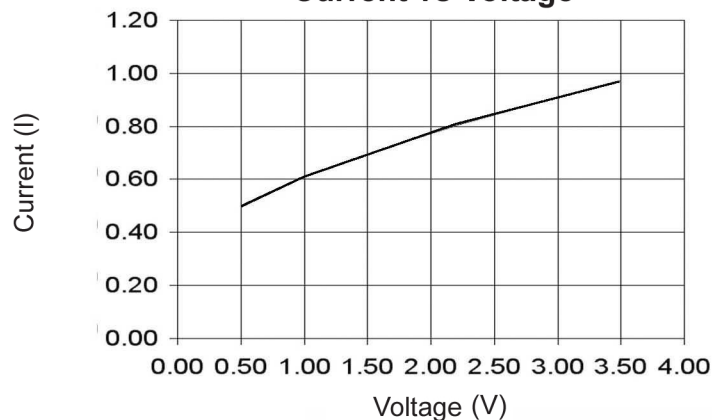


Modulation vs. Frequency

(50% Duty Cycle)

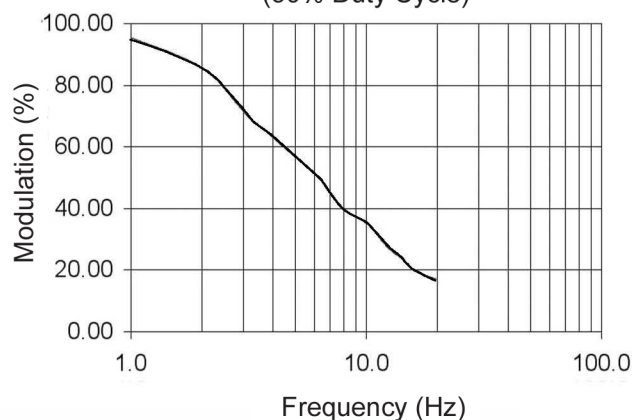

Radiant Exitance

Volts = 3.5, Distance = 3.0 inches from source

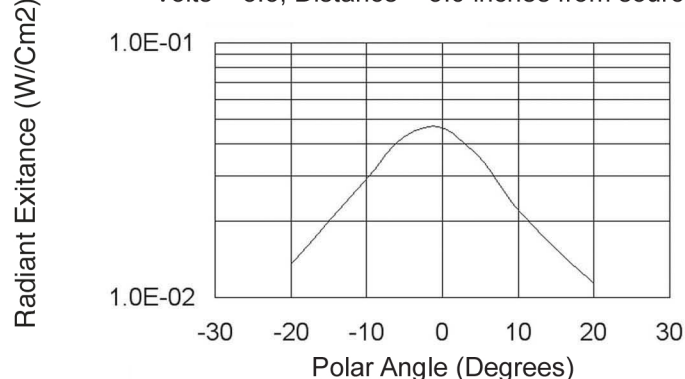

Polar Angle	Average Intensity (Watts/Cm2)
-20	1.35E-02
-15	2.00E-02
-10	2.90E-02
-5	4.30E-02
0	4.65E-02
5	3.50E-02
10	2.20E-02
15	1.55E-02
20	1.15E-02

* Patented