



Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com



PULSABLE IR SOURCE Model EF-8530

HelioWorks, Inc. offers a unique pulsable infrared emitter with three (3) radiating elements that can be addressed individually (4 lead package), or in total (2 lead package). It can operate in pulsed or steady state mode at a peak temperature of 700°C (973°K) in an industry standard TO-8 package with no window. Specify either 2 lead (EF-8532-2) or 4 lead (EF-8532-4) version. Photo shows 4 lead version.



Key Features Include:

- Filament has uniform emitting area
- Emissivity is 0.88
- No window
- Operates in pulsed or steady state mode
- Industry standard TO-8 package
- Operates at peak temperature of 700°C (973°K)
- Large temperature change, ΔT , during pulsing


Electrical Specifications (2 lead package):

Peak Voltage = 3.00 Volts DC MAXIMUM


Peak Current = 1.34 Amps

Peak Power = 4.0 Watts

Current vs Voltage

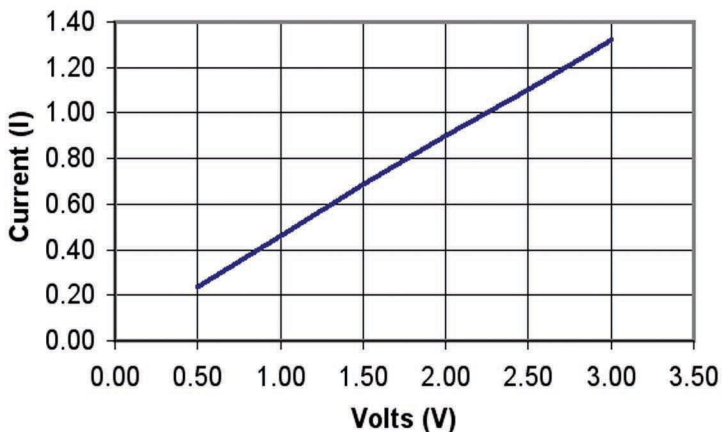


Modulation (%) Vs. Frequency (Hz)
(50% duty cycle)

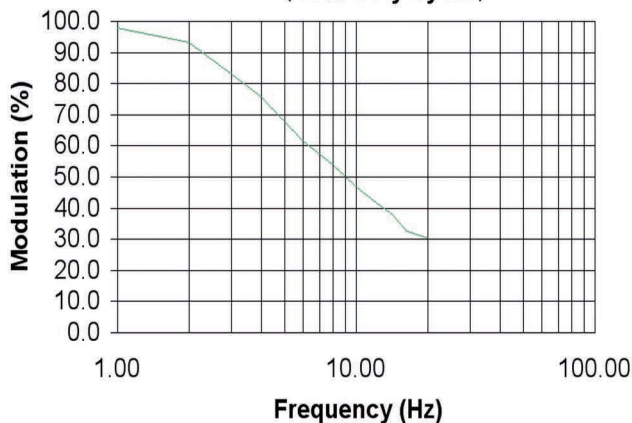


Radiant Exitance

(V = 3.0, Distance = 2 inches from face)

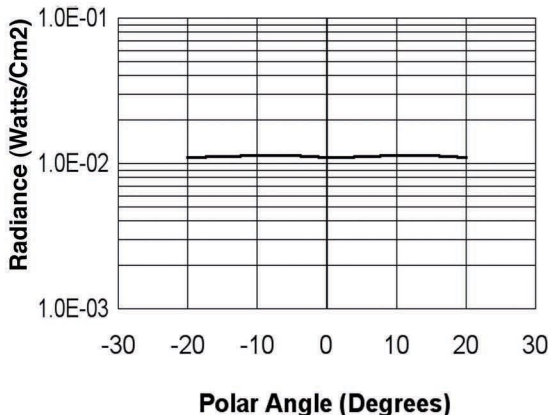

Polar Angle	Average (Watts/Cm2)
-20	1.10E-02
-15	1.12E-02
-10	1.14E-02
-5	1.13E-02
0	1.10E-02
5	1.11E-02
10	1.13E-02
15	1.13E-02
20	1.10E-02

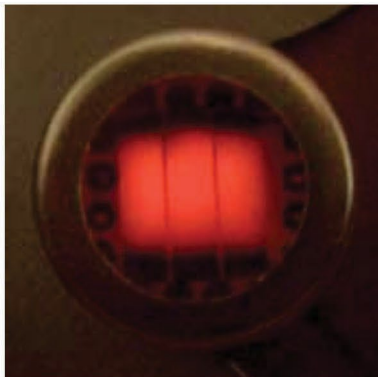

Radiance vs Angle From Axis 8532 and EF-8532R

EF-

