



# LIGHT EMITTING DIODES 1.6÷4.6 $\mu\text{m}$


## Model LED29-TEC-PR 2.9 $\mu\text{m}$ 8 $\mu\text{W}$

- Light Emitting Diodes **LED29-TEC-PR** are designed for emitting at a spectral range around 2900 nm. Thermocooler and thermoresistor are mounted inside 9 mm package TO-5. Heterostructures (HS) are grown on InAs substrates
- Light Emitting Diodes **LED29-TEC-PR** are developed for using in optical gas sensors and medical diagnostics. Such construction gives possibility for temperature stabilization of LED parameters. Lifetime is more then 10000 hours.
- Related products: **LED29** can be used in optical pair with our photodiodes **PD36**. Our standard **LED Driver** provides power supply of **LED29-TEC-PR** in two recommended here regimes (Quasi-CW and Pulsed).




Parameters	Min	Typ	Max
Wavelength, $\mu\text{m}$	2.80	2.90	3.00
FWHM, $\mu\text{m}$	0.60	0.70	0.80
Optical Power, $\mu\text{W}$			
Quasi-CW @ 200 mA	6	8	10
Pulsed@2A	120	150	170
Switching Time, ns	10	30	50
Range of temperature control $^{\circ}\text{C}$	-10÷+60		
Emitting Area, $\mu\text{m}$	300x300		
Soldering temperature	95 $^{\circ}\text{C}$		
Package	TO-5 with Thermocooler, Thermistor and Parabolic Reflector		

Recommended regimes of LED operation

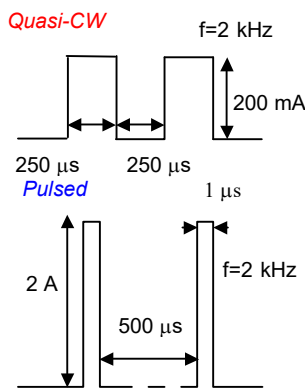

Main thermocooler parameters (without load)

$I_{\text{max}}$ (Amps)	$Q_{\text{max}}$ (Watts)	$U_{\text{max}}$ (Volts)	$\Delta T_{\text{max}}$ ( $^{\circ}\text{C}$ )
0.7	0.4	1.0	67

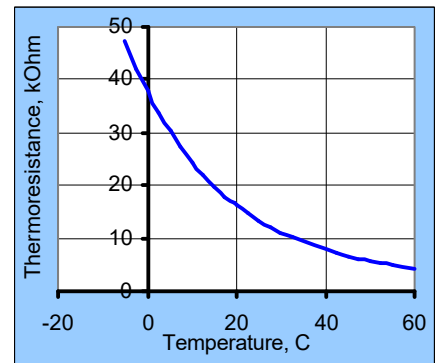

Package TO-5 with Parabolic Reflector

