



Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com

Click to go to
Product Selector

LIGHT EMITTING DIODES $1.6\text{--}4.6 \mu\text{m}$


Model LED29-TEC

$2.9 \mu\text{m}$ $8 \mu\text{W}$


- Light Emitting Diodes **LED29-TEC** are designed for emitting at a spectral range around 2900 nm. Thermocooler and thermoresistor are mounted inside 9 mm package TO-5. Heterostructures (HS) are grown on InAs substrates
- Light Emitting Diodes **LED29-TEC** are developed for using in optical gas sensors and medical diagnostics. Such construction gives possibility for temperature stabilization of LED parameters. Lifetime is more than 10000 hours.
- Related products: **LED29** can be used in optical pair with our photodiodes **PD36**. Our standard **LED Driver** provides power supply of **LED29-TEC** in two recommended here regimes (Quasi-CW and Pulsed).

Parameters	Min	Typ	Max
Wavelength, μm	2.80	2.90	3.00
FWHM, μm	0.60	0.70	0.80
Optical Power, μW			
Quasi-CW @ 200 mA	6	8	10
Pulsed@2A	120	150	170
Switching Time, ns	10	30	50
Range of temperature control $^{\circ}\text{C}$	-10 -- +60		
Emitting Area, μm	300x300		
Soldering temperature	95 $^{\circ}\text{C}$		
Package	TO-5 with thermocooler and thermistor		

Package TO-5

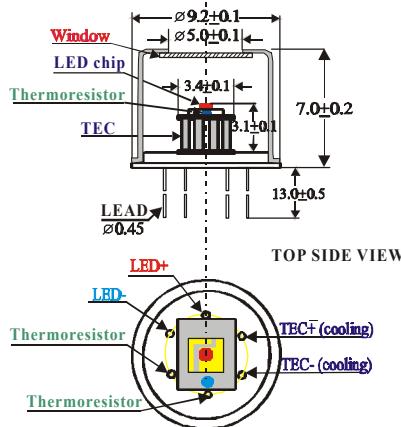


Recommended regimes of LED operation

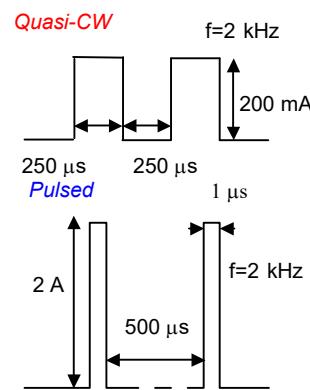

Main thermocooler parameters (without load)

I_{max} (Amps)	Q_{max} (Watts)	U_{max} (Volts)	ΔT_{max} $^{\circ}\text{C}$
0.7	0.4	1.0	67

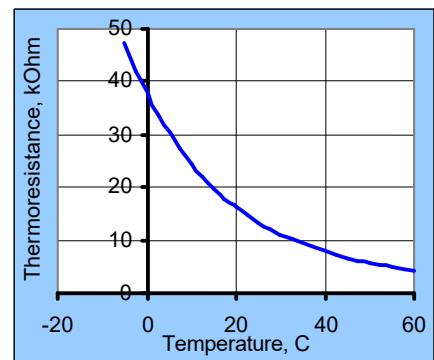

LED29 typical spectra at different temperatures

