



# Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300


[www.eoc-inc.com](http://www.eoc-inc.com) | [info@eoc-inc.com](mailto:info@eoc-inc.com)

Click to go to  
Product Selector



## Features

- High reliability
- Spectral Selectivity
- Easy to use in lock-in circuits
- Parabolic reflector

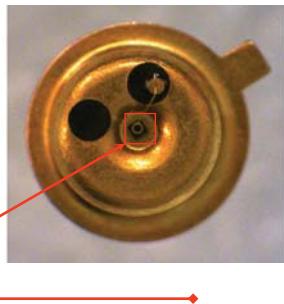

## Description

Light emitting diode **LED46-PR** demonstrates typical maximum of emitting wavelength of  $\lambda_P = 4.6 \mu\text{m}$  ( $I = 150 \text{ mA}$ ,  $f = 0.5 \text{ KHz}$ , duty cycle: 50%).

The components is mounted in a standard 5.5 mm TO-18 package with parabolic reflector (PR).


LED heterostructure is grown on InAs substrate.

Related products: **LED46-PR** can be used in optical pair with our [PD48-05-WS](#) photodiodes.

## LIGHT EMITTING DIODE

4.4 - 4.7  $\mu\text{m}$

### LED46-PR

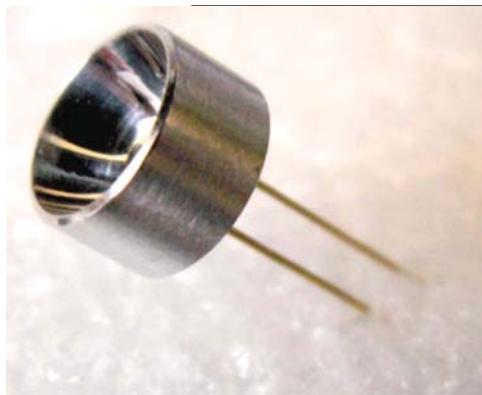

## Applications

- Measuring equipment
- Gas analysis (CO, N<sub>2</sub>O, HCN)
- Analytical spectral devices

## Options

- Power supply: [LED Driver D-31M](#)

## General characteristics

Package	Parameter	Symbol	Value	Unit
TO-18 with PR	Maximum operating current	$I^*_{\text{QCW}}$	220	mA
		$I^{**}_{\text{Pulsed}}$	2000	
	Soldering temperature	$T_s$	+ 230	°C
	Operating temperature	$T_{\text{opr}}$	- 30...+ 50	°C
	Storage temperature	$T_{\text{stg}}$	- 55...+ 60	°C
	Weight	$m$	0.68	g
	Size	D H	9.0 18.5	mm

\* Quasi-CW mode: Repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%

\*\* Pulse mode: Repetition rate: 0.5 kHz, pulse duration: 2  $\mu$ s, duty cycle: 0.1%


## Electrical and optical characteristics

Parameter	Symbol	Condition	Min	Max	Unit
Peak emission wavelength	$\lambda_p$	$I_F = 150$ mA	$\lambda_{\text{typ}} = 4.6$		$\mu\text{m}$
			4.4	4.66	
Spectral FWHM	$\Delta\lambda$	$I_F = 150$ mA	800	1000	nm
Pulse optical power	$P^*_{\text{QCW}}$	$I_F = 200$ mA	4	12	$\mu\text{W}$
	$P^{**}_{\text{Pulsed}}$	$I_F = 1000$ mA	20	55	
Forward voltage	$V_F$	(*)	0.3	0.8	V
Switching time	$\tau$		10	30	ns


\* Quasi-CW mode: repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%, current: 200 mA

\*\* Pulse mode: repetition rate: 0.5 kHz, pulse duration: 2  $\mu$ s, duty cycle: 0.1%, current: 1 A


## Electroluminescence spectra

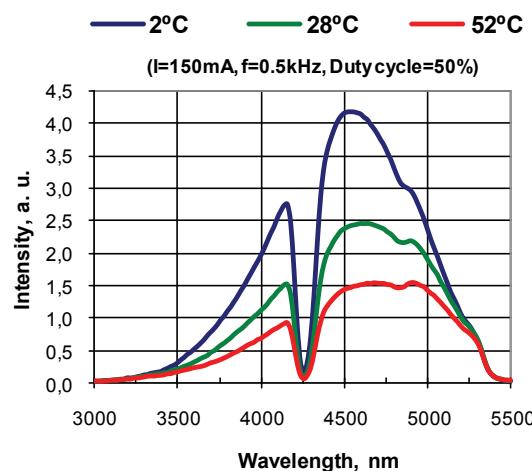


## Pulse optical power vs. current

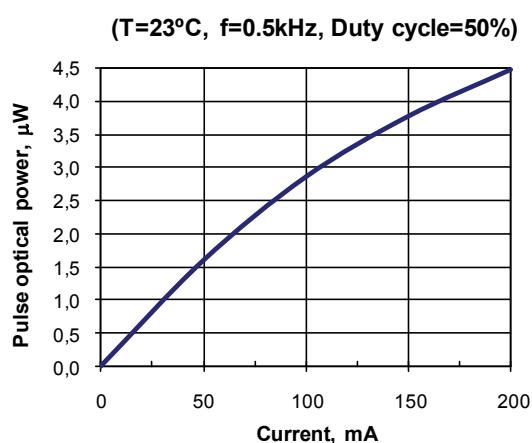



## ▼ Current vs. voltage

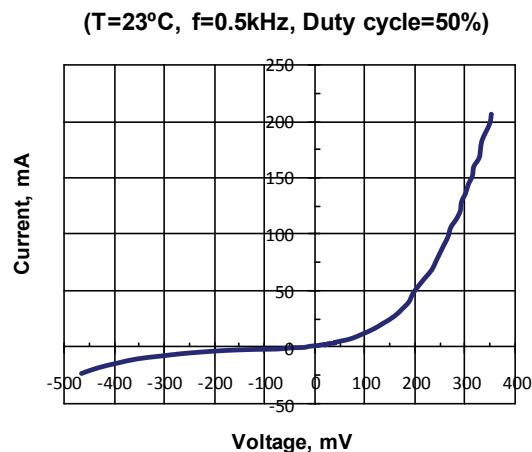

## ▼ Field pattern

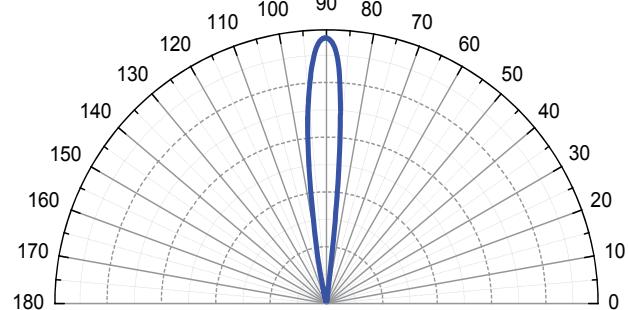

## ▼ TO-18 package with PR - dimensions (mm)

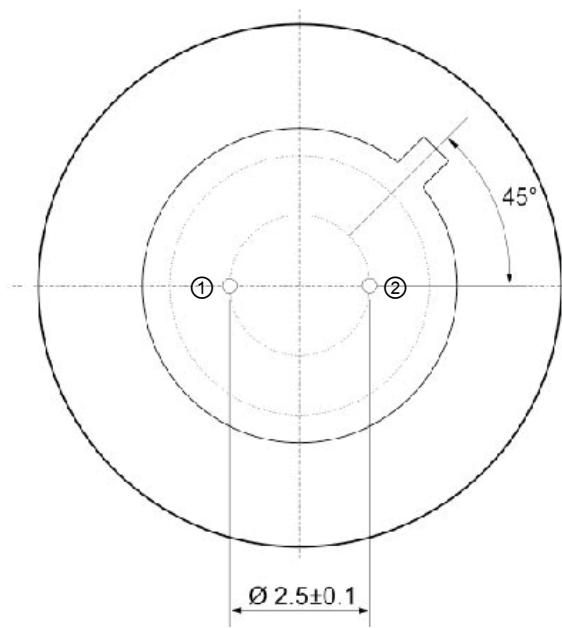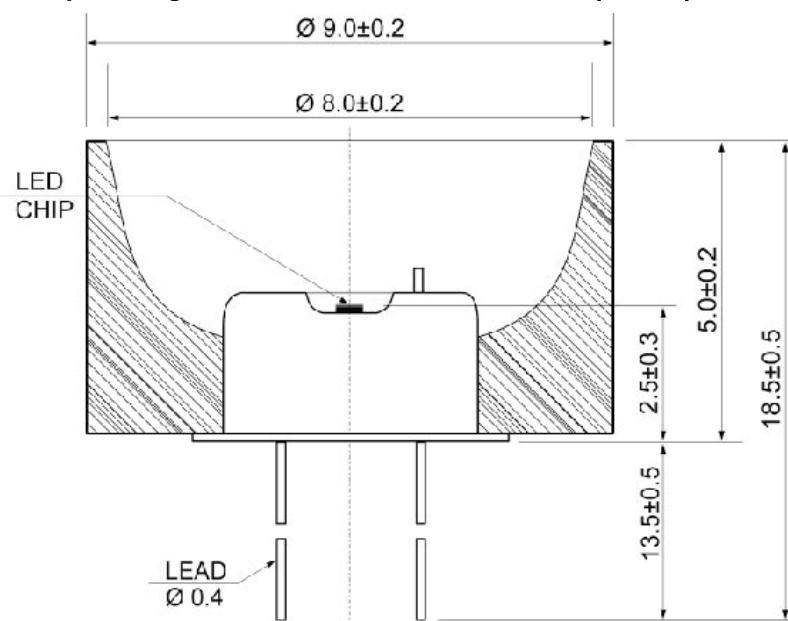

Pin	Description
① Common to case	Diode (cathode)*
②	Diode (anode)*

\* Attention: Pin polarity can be changed.