



Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

www.eoc-inc.com | info@eoc-inc.com





PHOTODIODE

PD48-03-NS

3.7 - 4.8 μm

Features

- High reliability
- Superior linearity
- Easy-to-use detector/amplifier modules are also available

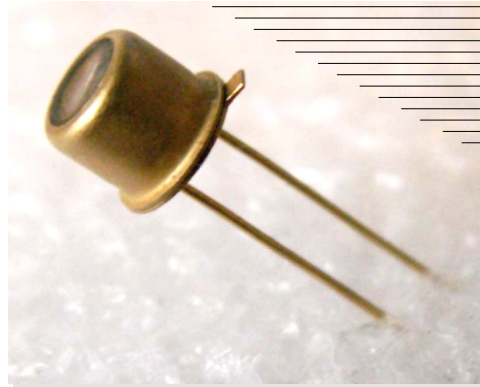

Photodiode CHIP

Applications

- Environment measurements
- Gas analysis (CH_4 , CO , CO_2)
- Infrared spectrophotometry
- Laser detection
- Analytical instruments

Accessories (optional)

- Amplifier AM-07M

Description

Photodiode **PD48-03-NS** is a model of photodetector with narrow spectral range (**NS**) for detection of radiation in the Middle Infrared (Mid-IR) spectral range from 3700 to 4800 nm operating at room temperature.

Photodiode is disposed inside the standard 5.5 mm TO-18 package.

Diameter of the photosensitive area of **PD48-03-NS** is 300 μm . High speed of response makes it possible for detection of modulated radiation of laser diodes (LDs) and light-emitting diodes (LEDs).

Related products: **PD48-03-NS** can be used in optical pair with our **LED37**, **LED38**, **LED39**, **LED41**, **LED43**, **LED46**.

General characteristics


NS - narrow spectrum

Package	Parameter	Symbol	Value	Unit
TO-18	Sensitive area diameter	d	0.3	mm
	Weight	m	0.26	g
	Operating temperature	T _{opr}	- 20...+ 40	°C
	Soldering temperature	T _s	+ 230	°C
	Storage temperature	T _{stg}	- 55...+ 60	°C
	Maximum reverse bias voltage	V _b	- 0.5	V
	Size		D	5.5
H			17.7	


Electrical and optical characteristics

Parameter	Symbol	Condition $T \approx +20\text{ }^\circ\text{C}$	Min.	Typ.	Max.	Unit
Spectral sensitivity range	λ	at level 10%	2.5 - 4.9			μm
Peak sensitivity wavelength	λ_p	at level 90%	4.3 - 4.6			μm
Photo sensitivity	S	at λ_p	0.6	0.7	0.8	A/W
Detectivity	D^*	at λ_p	$5 \cdot 10^8$	$7 \cdot 10^8$	$8 \cdot 10^8$	$\text{cm} \cdot \text{Hz}^{1/2} \cdot \text{W}^{-1}$
Dark current	I_d	$V_b = -0.1\text{ V}$	0.6	0.9	1.2	mA
Rise time	t_r	$V_b = 0\text{ V}, R_L = 50\ \Omega$	≤ 20			ns
Fall time	t_f					
Capacitance	C	$V_b = 0\text{ V}, f = 1\text{ MHz}$	25	30	50	pF
Shunt resistance	R_0	$V_b \approx \pm [5 - 10]\text{ mV}$	100	150 - 200	500	Ω
Noise equivalent power	NEP	at λ_p	-	-	-	$\text{W} \cdot \text{Hz}^{-1/2}$


Spectral response

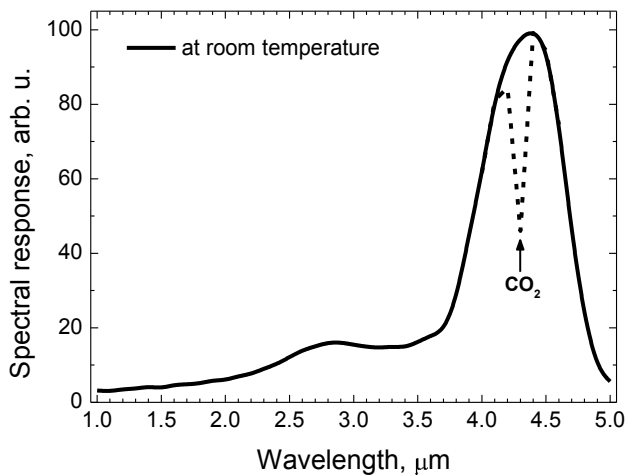


Dark current vs. reverse voltage

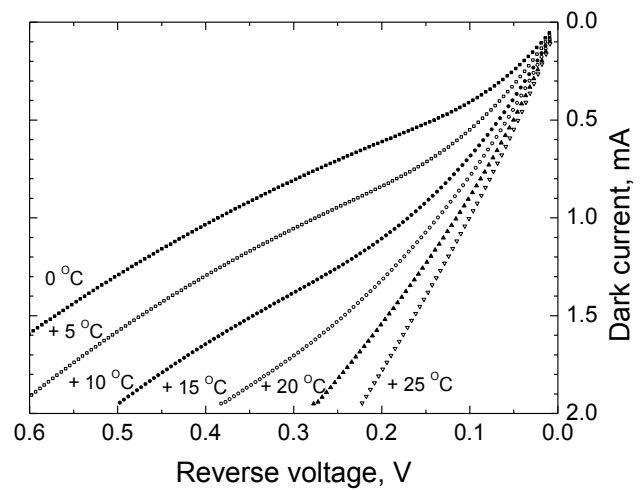



Shunt resistance vs. temperature

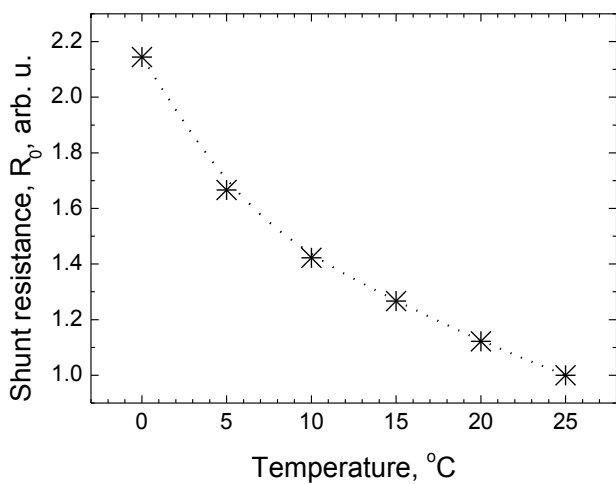

Capacitance vs. reverse voltage

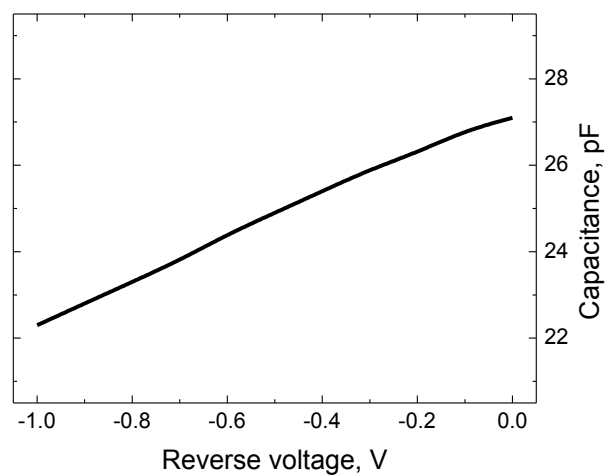

▼ TO-18 package dimensions (unit: mm)

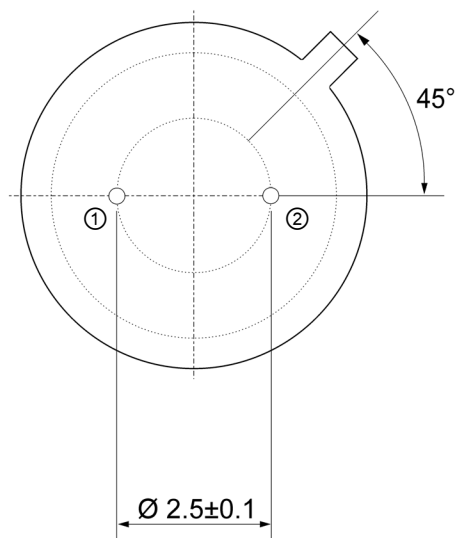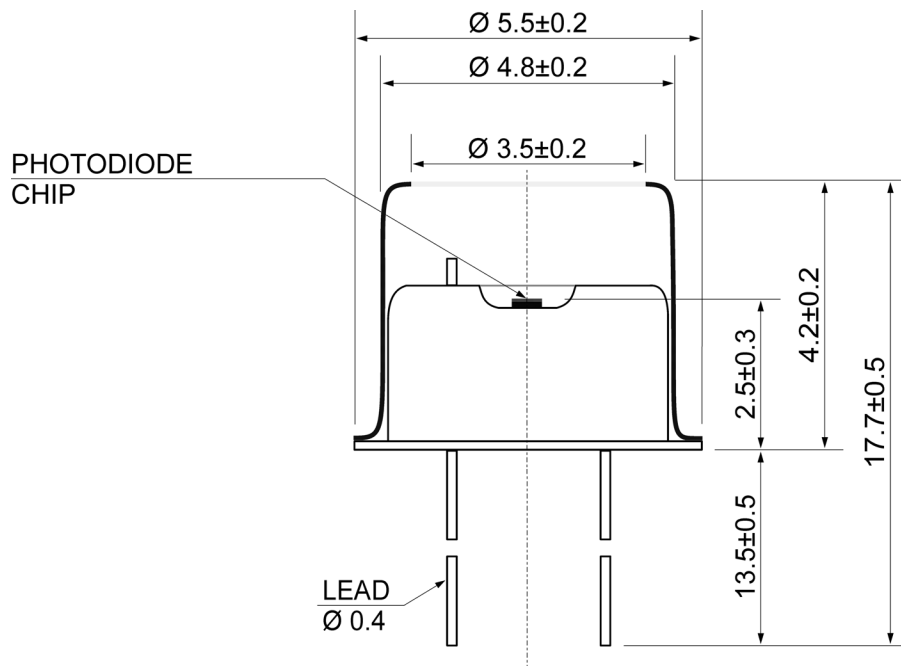

Pin	Description
①	Detector (cathode)*
②	Detector (anode)*

*Special order: the pin polarity can be changed.