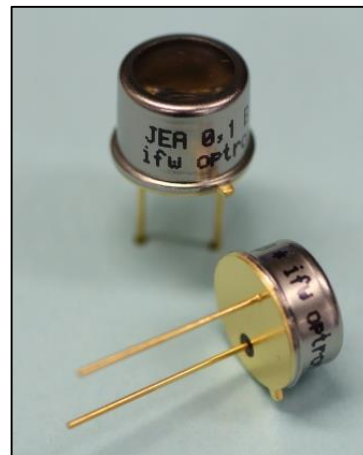


**Characteristics :**

- ◆ small area SiC-photodiode
- ◆ active area: 0,1 mm<sup>2</sup>
- ◆ UV-filters for UVA-, UVB- and UVC-range
- ◆ more filter options on request
- ◆ hermetically sealed TO-package
- ◆ RoHS, REACH and WEEE conform

**Applications :**

- ◆ optical measurement in UV-range with selected spectral range
- ◆ control of sterilization lamps
- ◆ flame control
- ◆ sun light measurement


**Grenzwerte :**

- ◆ reverse voltage 10 V
- ◆ operating temperature range - 40 °C ... 125 °C
- ◆ storage temperatur range - 40 °C ... 125 °C
- ◆ soldering temperature (3s) 260 °C

**Versions:**

Filter	isolated Pin: Anode	isolated Pin: Cathode	Anode, Kathode: isolated + Case-Pin	Operating Temperature up to 150 °C
UV-A	JEA0,1A	JEACO,1A	JEA0,1A-I	*-HT
UV-B	JEA0,1B	JEACO,1B	JEA0,1B-I	
UV-C	JEA0,1C	JEACO,1C	JEA0,1C-I	


**Further available optical filters:**

Filter	Spectral-range	Part	Datasheet
UV-AB	280-395 nm	JEA0,1AB	on request
UV-BC	228-322 nm	JEA0,1BC	on request
UV-DVGW	240-290 nm	JEA0,1DVGW	on request
UV-A-350	300-400 nm	JEA0,1A-350	on request
UV-A-365	350-400 nm	JEA0,1A-365	on request
Erythema	CIE 87	JEA0,1E	on request

**Further available packages:**

Package	Parts	Datasheet
TO18	JEA0,1A/B/C-S	on request

### Relative Spectral Responsivity:

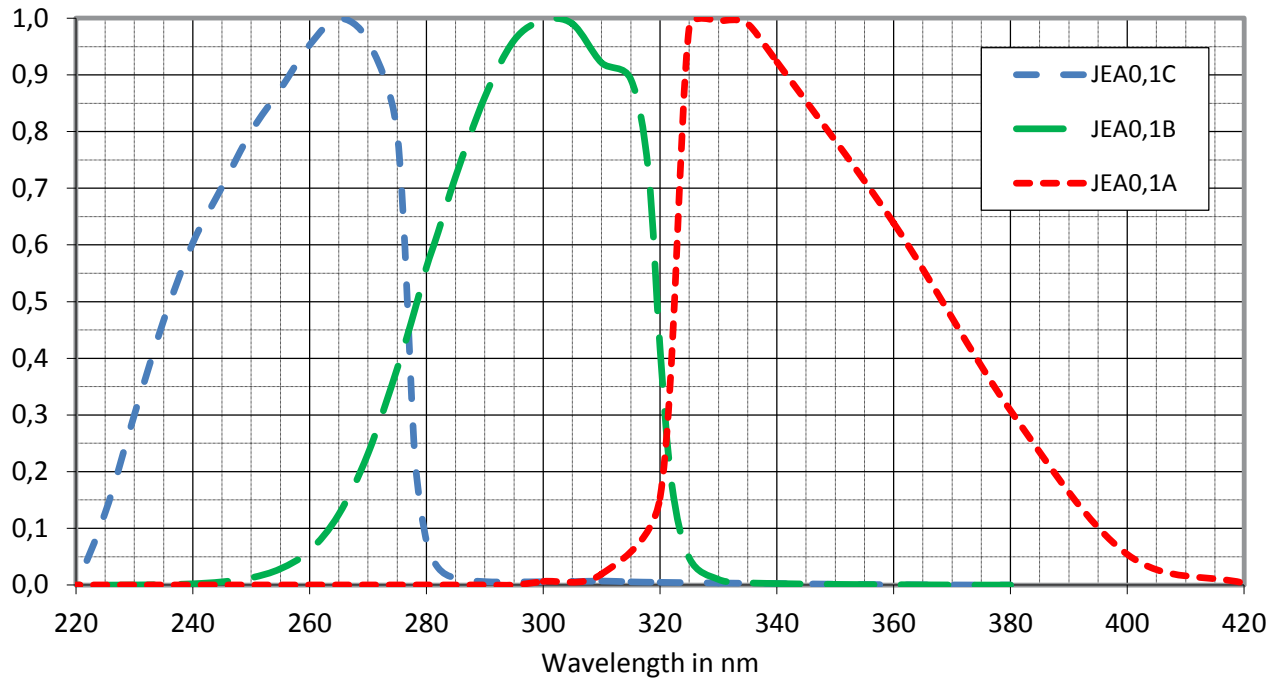


### Technical Data:

Parameter	Test Conditions	UV-A	UV-B	UV-C	Einheit	
active area		0,365 x 0,365			mm <sup>2</sup>	
spectral range	$S = 0,1 * S_{max}$	$\lambda_{min}$	318	265	225	nm
		$\lambda_{max}$	395	322	280	nm
wavelength of maximum responsivity	$\lambda_{Smax}$	330	300	265	nm	
maximum responsivity $S_{max}$	$S = S_{max}$	0,14	0,14	0,18	A/W	
dark current $I_R$	$V_R = 1 V$	10			fA	
junction capacitance $C_j$	$f = 10 kHz$	30			pF	
field of view	Anode isolated	±30	±30	±45	degree	
	Cathode isolated	±27				
	A. + C. isolated	±28				
weight		1,1			gram	
package/drawing	Anode isolated	TO5	TO5	TO5-flat		
	Cathode isolated	TO5				
	A. + C. isolated	TO5-isolated				

typical values; test conditions, as not otherwise specified:  $T_A = 25 ^\circ C$ ,  $V_R = 0 V$

Package Dimensions:


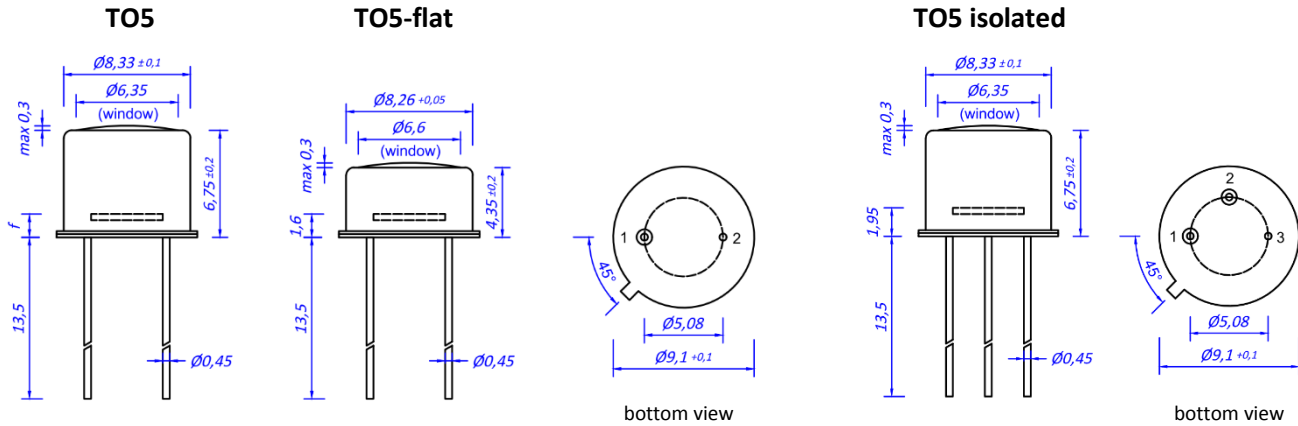


**Anode isolated:** Pin 1: Anode  
Pin 2: Cathode + Case  
f = 1,6 mm

**Anode + Cathode isolated:** Pin 1: Anode  
Pin 2: Cathode  
Pin 3: Case

**Cathode isolated:** Pin 1: Cathode  
Pin 2: Anode + Case  
f = 1,85 mm

Application Example:

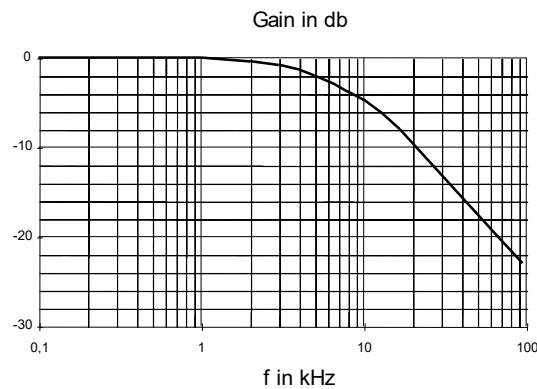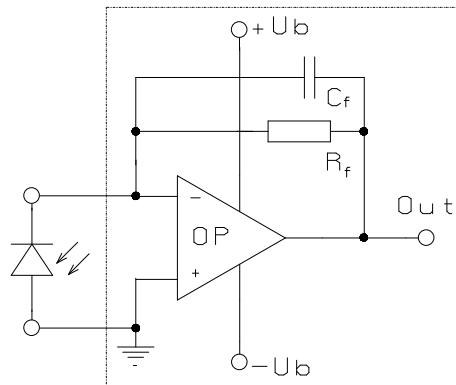

The application example shows a typical circuit  $R_f$  is responsible for the gain of the circuit  $C_f$  compensates the reverse junction capacitance of the photodiode and the input capacitance of the opamp. The exact value of  $C_f$  depends on  $R_f$ , used opamp and capacitance of the circuit. A typical value is 1pF.

The chart shows dependence of amplitude of the application circuit with opamp = AD795,  $R_f = 10 \text{ M}\Omega$  and  $C_f = 1\text{pF}$ .