



# Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300

[www.eoc-inc.com](http://www.eoc-inc.com) | [info@eoc-inc.com](mailto:info@eoc-inc.com)



## UV Sensor Probe

### GUVx-T1xGC-3LW5



#### Features

Water Environment (<10 bar)

Single Supply Voltage, 0-5V Voltage Output

#### Applications

UV Power Measure

UV Lamp Monitoring



LW5 Probe (Socket : 8A PT tab SUS)



Connection Cable (IP67, 5m)

Fig1. UV Sensor Probe

#### Case dimensions

Thread/Length for Mounting	Diameter (mm)	Window (mm)	Wrench Size (mm)	Length (mm)	Weight (g)	Body (stainless steel)
PT1/4 " / 12 mm	21	7	19	63	67	316L (1.4404)

#### Absolute Maximum Ratings


Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Storage Temperature	T <sub>st</sub>	-40		90	°C	
Operating Temperature	T <sub>op</sub>	-30		85	°C	

#### Electro-Optical Characteristics (at 25 °C)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Supply Voltage	V <sub>cc</sub>	9		24	V	DC
Supply Current	I <sub>Q</sub>		3.3		mA	
Detection Range	GUVV-T11GC-3LW5	λ	230	395	nm	10% of Max.
	GUVB-T12GC-3LW5	λ	220	320	nm	10% of Max.
	GUVC-T11GC-3LW5	λ	220	280	nm	10% of Max.
Output Voltage	V <sub>out</sub>	0		5	V	
Detection Power Range	P	0		100	mW/cm <sup>2</sup>	
Response Time	T		10		ms	

\* Maximum of detection power : 20 mW/cm<sup>2</sup> (Option), 100 mW/cm<sup>2</sup> (Standard), 1000 mW/cm<sup>2</sup> (Option)


#### Output Voltage along UV power

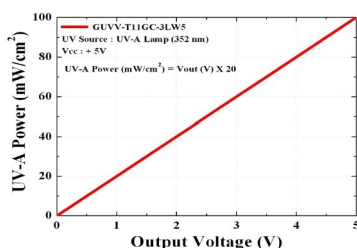

GUVV-T11GC-3LW5

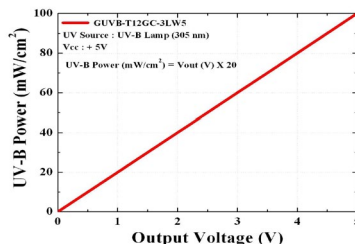

GUVB-T12GC-3LW5

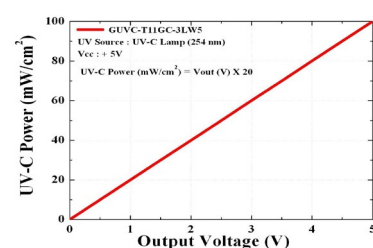

GUVC-T11GC-3LW5

UV Power (mW/cm<sup>2</sup>) = Vout (V) × 20

\* Cover thread with teflon tape or ceramo paste before turning in. Please also use a sealing ring behind thread.