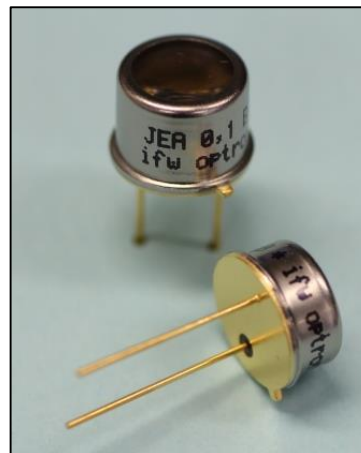


**characteristics :**

- ◆ small area SiC-photodiode
- ◆ active aerea: 0,1 mm<sup>2</sup>
- ◆ filter option for UVC-, UVB- and UVBC-range
- ◆ more filter options on request
- ◆ hermetically sealed TO-package
- ◆ RoHS, REACH and WEEE conform

**applications :**

- ◆ optical measurement in UV-range with limited spectral range
- ◆ control of sterilization lamps
- ◆ flame control
- ◆ sun light measurement


**absolute maximum ratings :**


- ◆ reverse voltage 10 V
- ◆ operating temperature range - 40 °C ... 125 °C
- ◆ storage temperatur range - 40 °C ... 125 °C
- ◆ soldering temperature (3s) 260 °C

**technical data :**


 test conditions, as not otherwise specified: T<sub>A</sub> = 25 °C , V<sub>R</sub> = 0 V

parameter	test condition	JEA0,1C	JEA0,1BC	JEA0,1B	unit
active aerea		0,365x0,365			mm <sup>2</sup>
spectral range					
λ <sub>min</sub>	S = 0,1 * S <sub>max</sub>	225	228	265	nm
λ <sub>max</sub>		280	322	322	nm
wavelength of peak response		265	275	300	nm
peak response S <sub>max</sub>	S = S <sub>max</sub>	0,18	0,19	0,12	AW
dark current I <sub>R</sub>	V <sub>R</sub> = 1 V	10			fA
junction capacity C	f = 10 kHz	30			pF
field of view (FOV)		±45	±45	±45	Grad
weight		0,92	0,92	1,06	Gramm
height of package H		4,5	4,5	6,8	mm

relative spectral responsivity

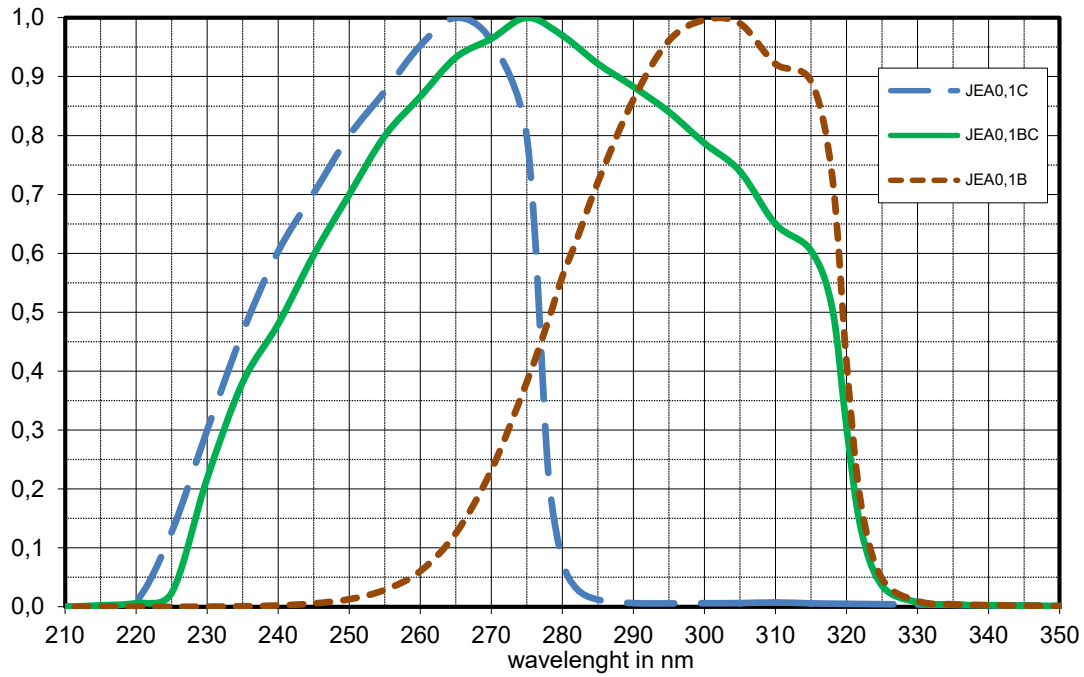



package dimension

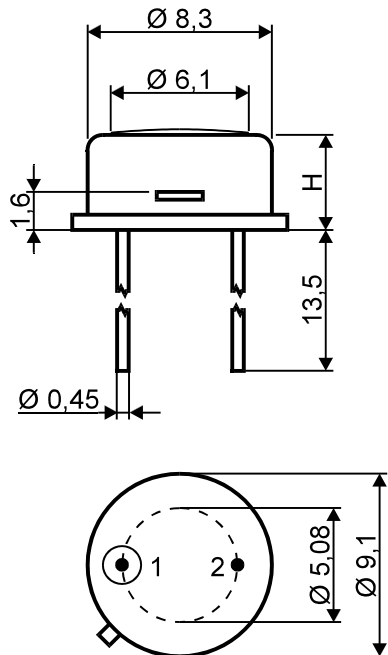

bottom view

- 1 anode
- 2 cathode & case

## application example

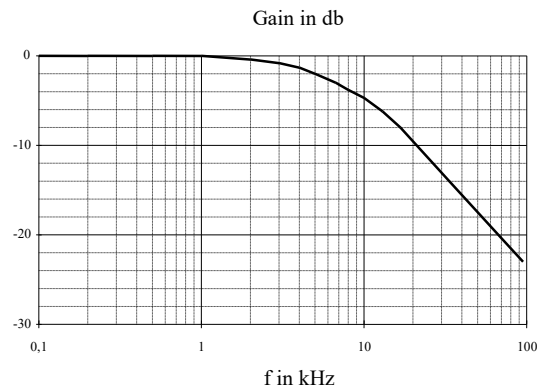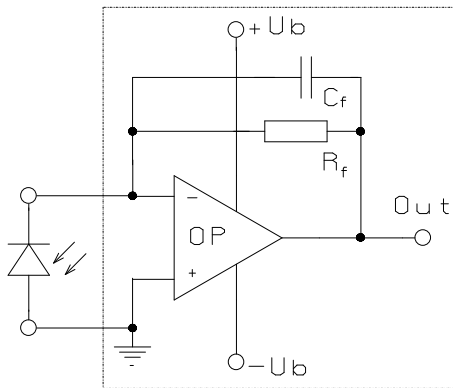

The chart shows dependence of amplitude of the application circuit with OP-amp = AD795,  $R_f = 10 \text{ M}\Omega$  and  $C_f = 1 \text{ pF}$

The application example shows a typical circuit  $R_f$  is responsible for the gain of the circuit.  $C_f$  compensates the reverse junction capacitance of the photodiode and the input capacitance of the OP-amp. The exact value of  $C_f$  depends on  $R_f$ , used OP-amp and capacitance of the circuit. A typical value is 1pF.

The chart shows dependence of amplitude of the application circuit with OP-amp = AD795,  $R_f = 10 \text{ M}\Omega$  and  $C_f = 1 \text{ pF}$