



Electro Optical Components, Inc.

5464 Skylane Boulevard, Suite D, Santa Rosa, CA 95403

Toll Free: 855-EOC-6300


www.eoc-inc.com | info@eoc-inc.com

Click to go to
Product Selector



Features

- High reliability
- Spectral Selectivity
- Easy to use in lock-in circuits

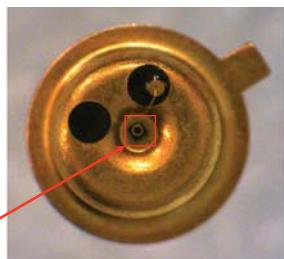


LED chip

LIGHT EMITTING DIODE

4.1 - 4.3 μ m

LED43

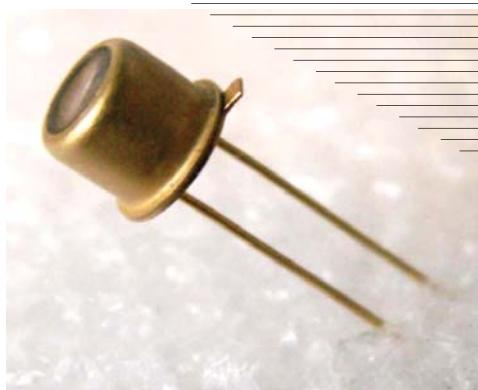

Applications

- Measuring equipment
- Gas analysis (CO_2 , C_2H_6)
- Analytical spectral devices

Options

- Power supply: [LED Driver D-31M](#)

Description

Light emitting diode **LED43** demonstrates typical maximum of emitting wavelength of $\lambda_P = 4.15 \mu\text{m}$ ($I = 150 \text{ mA}$, $f = 0.5 \text{ KHz}$, duty cycle: 50%).

LED chip is mounted in a standard TO-18 package.

LED heterostructure is grown on InAs substrate.

Related products: **LED43** can be used in optical pair with our [PD48-05-WS](#) photodiodes.

General characteristics

Package	Parameter	Symbol	Value	Unit
TO-18	Maximum operating current	I^*_{QCW}	220	mA
		I^{**}_{Pulsed}	2000	
	Soldering temperature	T_s	+ 230	°C
	Operating temperature	T_{opr}	- 30...+ 50	°C
	Storage temperature	T_{stg}	- 55...+ 60	°C
	Weight	m	0.26	g
	Size	D H	5.5 17.7	mm

* Quasi-CW mode: Repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%

** Pulse mode: Repetition rate: 0.5 kHz, pulse duration: 2 μ s, duty cycle: 0.1%


Electrical and optical characteristics

Parameter	Symbol	Condition $T_a \approx + 20$ °C	Min	Max	Unit
Peak emission wavelength	λ_p	$I_F = 150$ mA	$\lambda_{typ} = 4.15$		μm
			4.1	4.3	
Spectral FWHM	$\Delta\lambda$	$I_F = 150$ mA	700	1000	nm
Pulse optical power	P^*_{QCW}	$I_F = 200$ mA	8	26	μW
	P^{**}_{Pulsed}	$I_F = 1000$ mA	35	120	
Forward voltage	V_F	(*)	0.2	0.8	V
Switching time	τ		10	30	ns


* Quasi-CW mode: repetition rate: 0.5 kHz, pulse duration: 1 ms, duty cycle: 50%, current: 200 mA

** Pulse mode: repetition rate: 0.5 kHz, pulse duration: 2 μ s, duty cycle: 0.1%, current: 1 A


Electroluminescence spectra

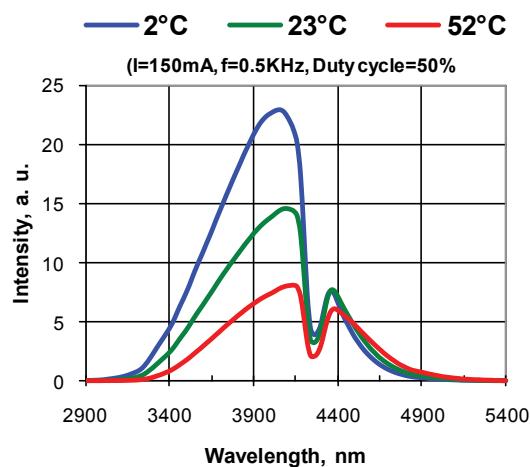


Pulse optical power vs. current

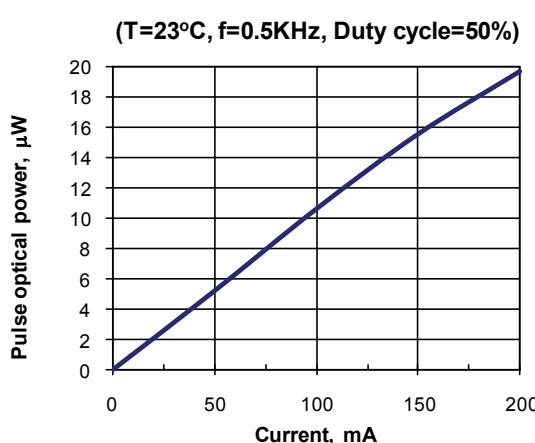



▼ Current vs. voltage

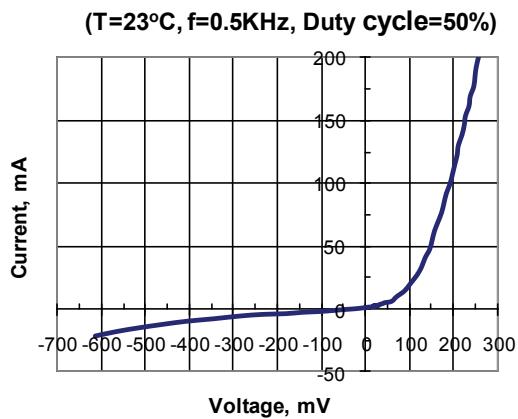

▼ Field pattern

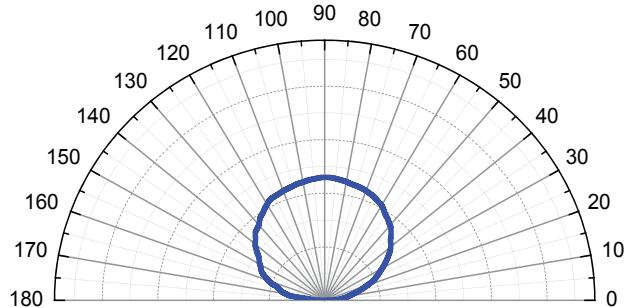

▼ TO-18 package dimensions (mm)

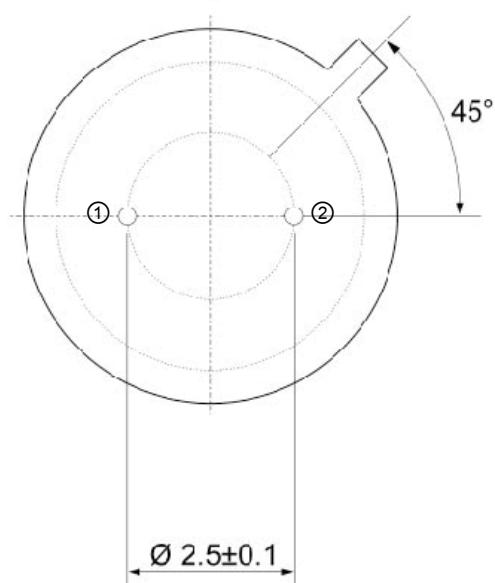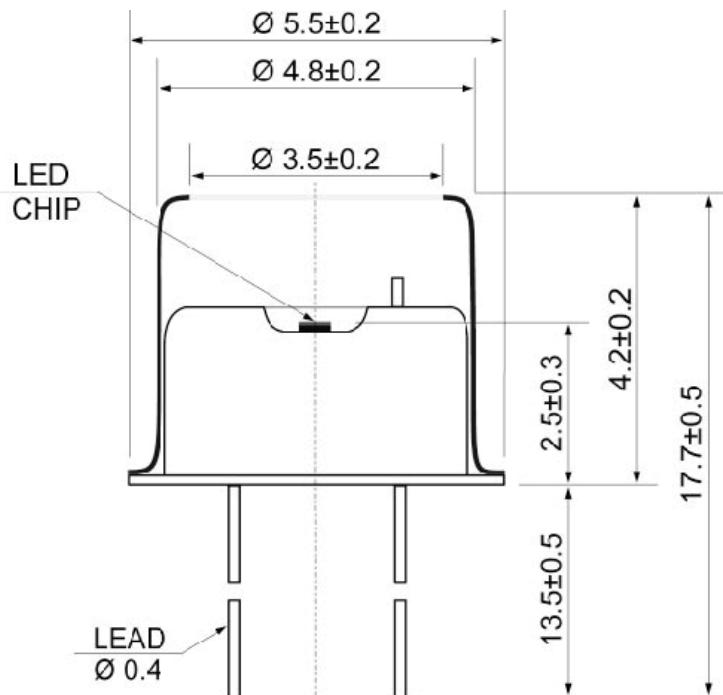

Pin	Description
① Common to case	Diode (cathode)*
②	Diode (anode)*

* Attention: Pin polarity can be changed.